

AURA LIVING

A quieter frame. A wider view.

TM-135 slim casement and fixed-window system



Application concept. Finish, overall dimensions and setting are illustrative.

AURA LIVING

A garden in the everyday.

TM-135 in a warm residential kitchen



Application visualization. Final selections follow approved samples and project drawings.

AURA LIVING

Fixed + operable.

Interior-side product appearance



Concept finish: charcoal. Frame appearance and hardware require sample confirmation.

AURA LIVING

Open to the outdoors.

Outward-opening sash with optional interior screen



Appearance concept. Hinge type, opening angle and handing are not product specifications.

TM-135 / system details

Supplier-drawing information


System	Slim outward-opening casement plus fixed window
Outer frame / mullion	AE135-10T / AE135-10R; listed wall thickness 2.0 mm
Glass sash	TM93-01; listed wall thickness 2.0 mm
Screen sash	TM135-01; listed wall thickness 1.6 mm
Fixed glazing bead option 1	TM135-04: 30 mm total glass; example 5 + 20A + 5
Fixed glazing bead option 2	TM135-06: 45.5 mm total glass; example 12 + 12A + 10 + 1.52 PVB + 10
Section depth shown	136 mm on assembly and profile drawings

SOURCE AND REVIEW NOTES

Source: Tian Mai TM-135 supplier drawings, pages 1, 3 and 4.

Glass alternatives apply to the listed fixed glazing beads; they are not a blanket whole-window specification.



No U-factor, SHGC, acoustic, air, water, certification or maximum-sash claims are added in this catalog.




天迈铝业
TIAN MAI LV YE

TM-135极窄外开窗


TM-135极窄外开窗装配示意图

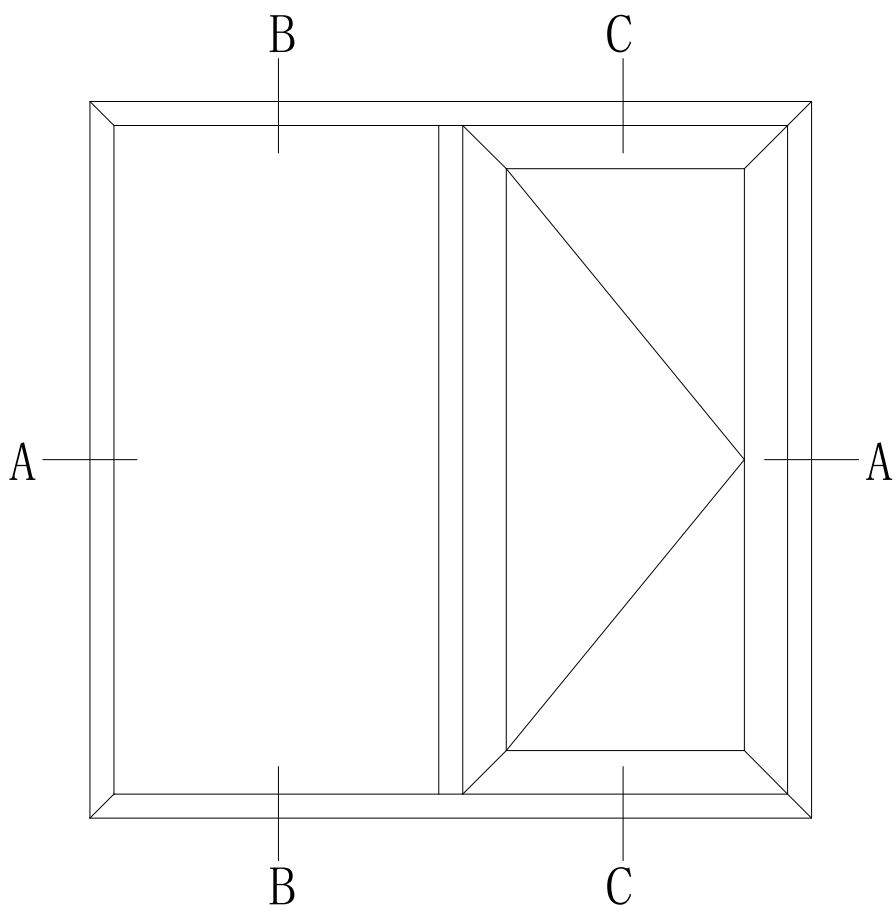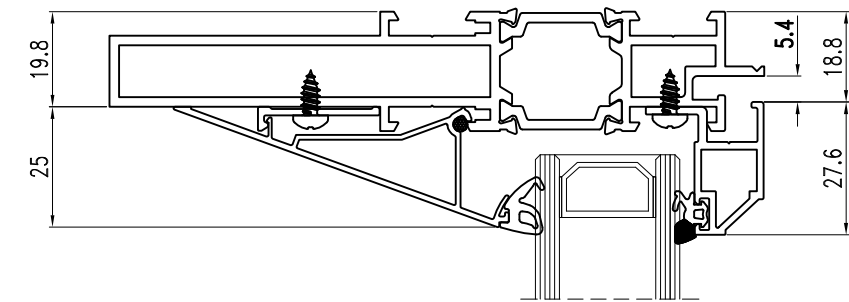


室内
INDOOR

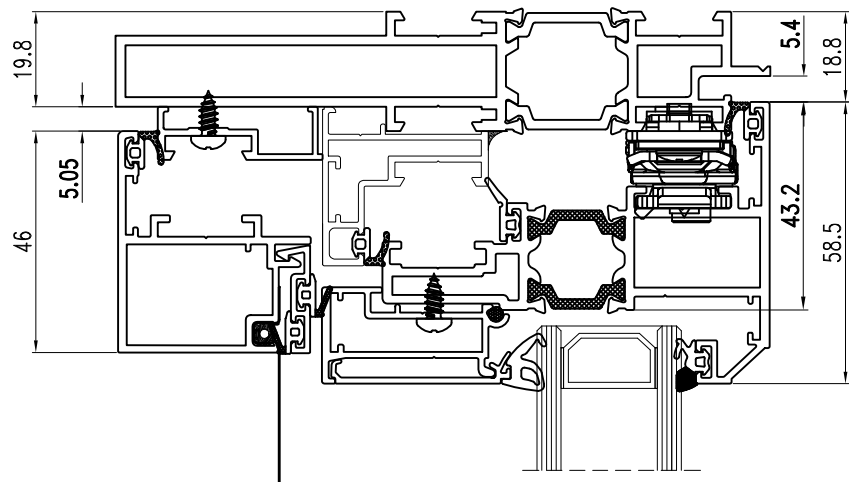



室外
OUTSIDE

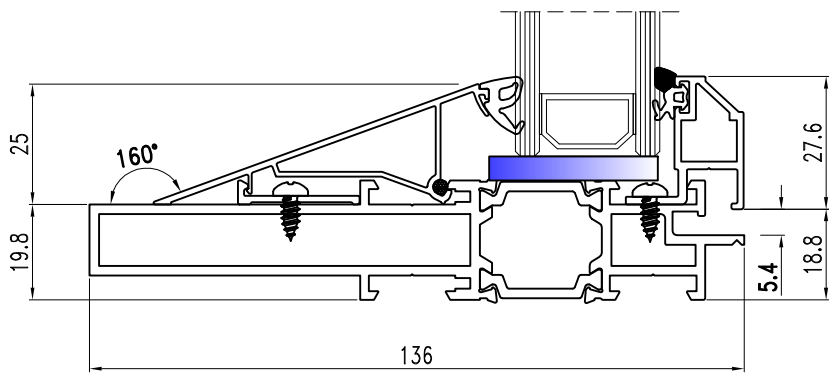

B-B

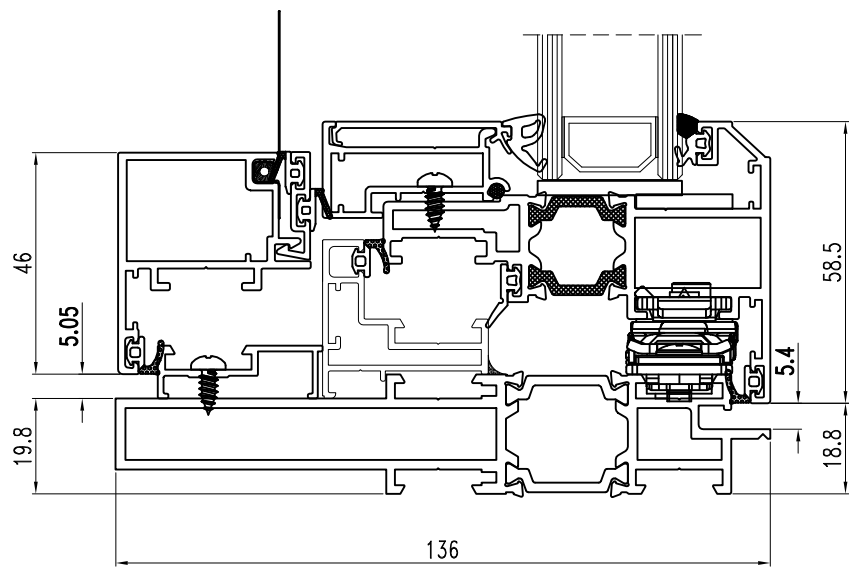


C-C

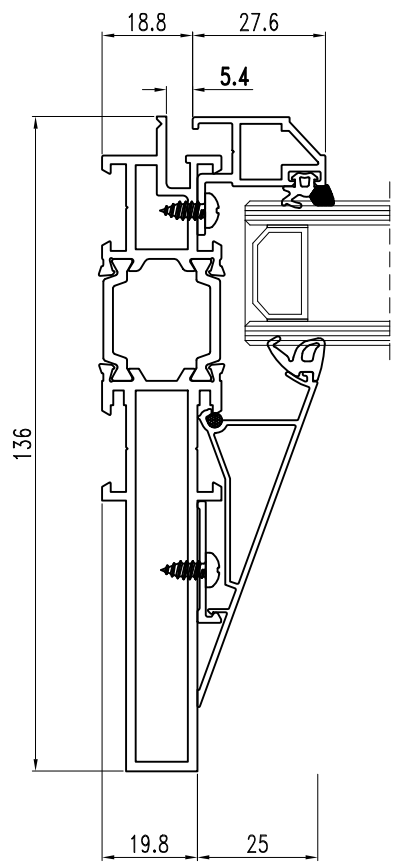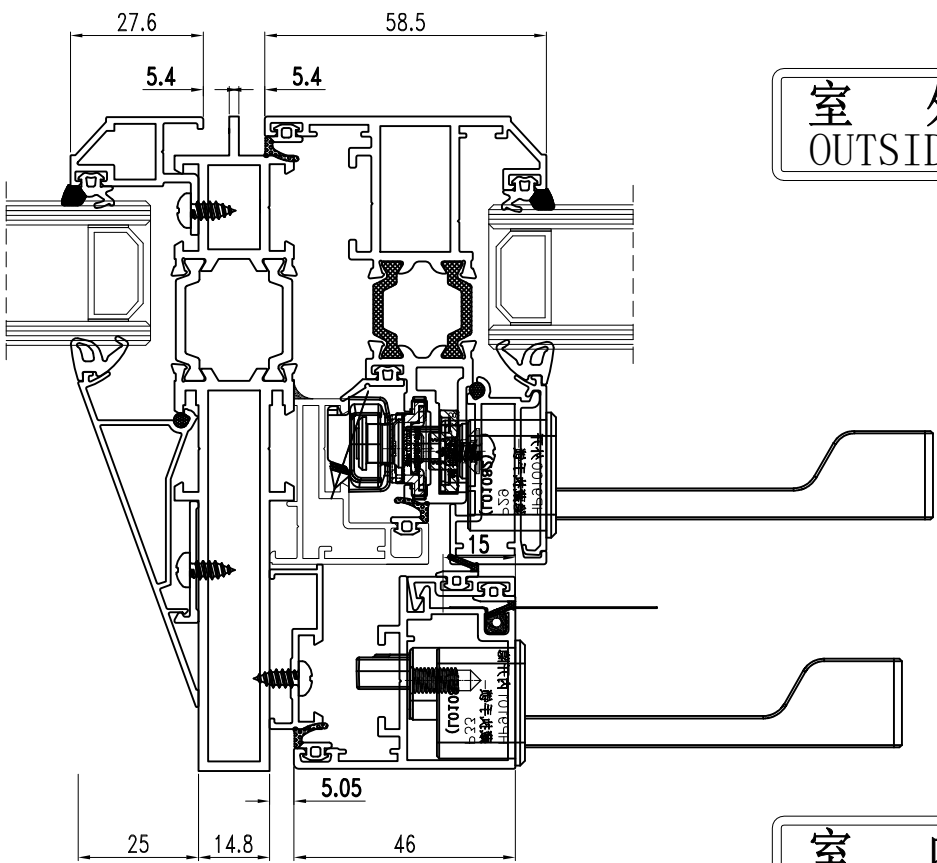


室外
OUTSIDE

室内
INDOOR

A-A

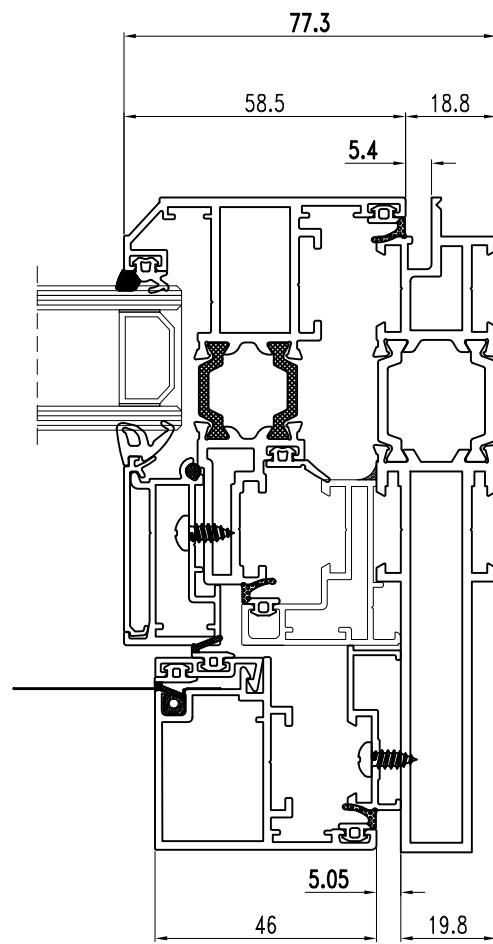





天迈铝业
TIAN MAI LV YE

TM-135极窄外开窗


选配应用方案装配示意图

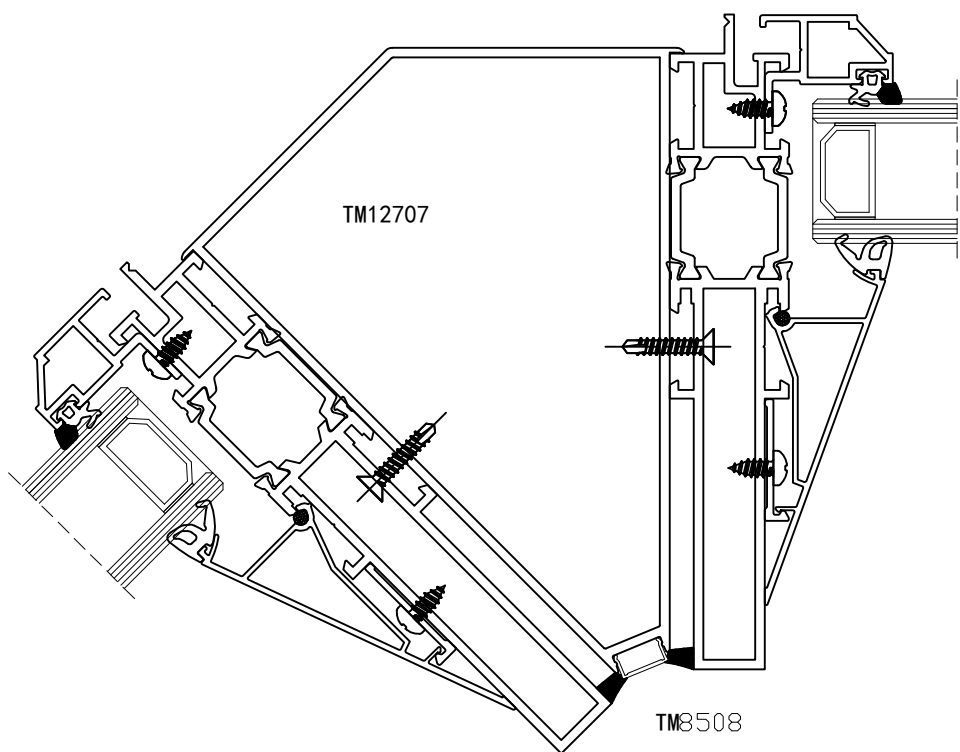


135° 转角料

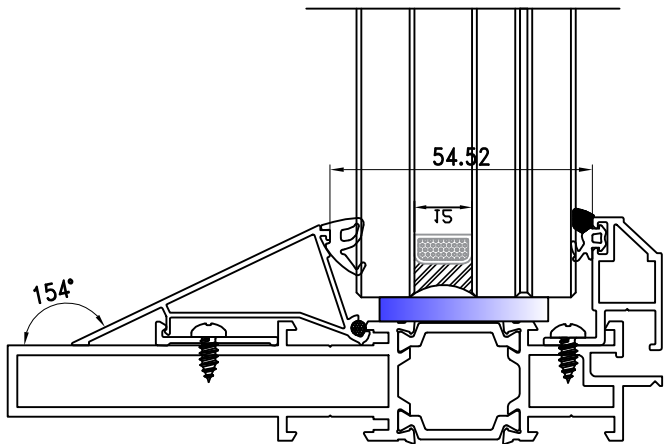


大玻璃压线料

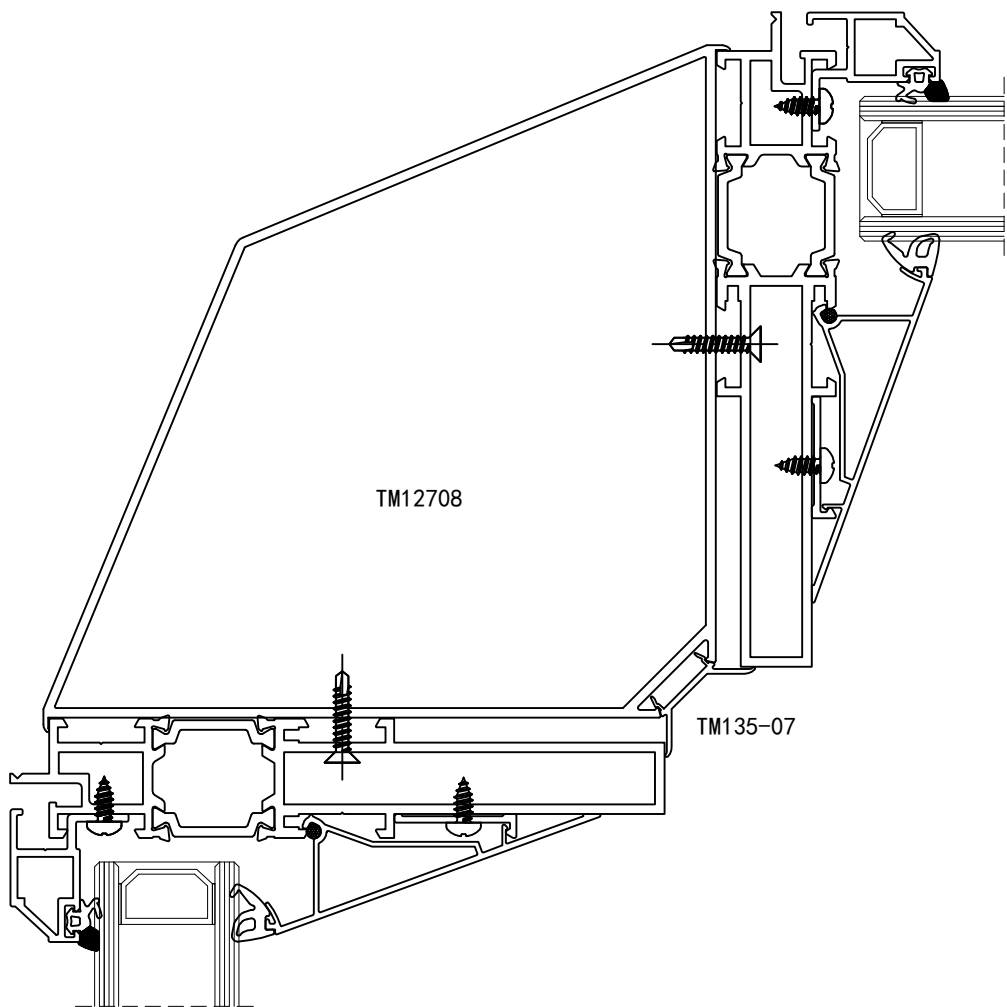

90° 转角料

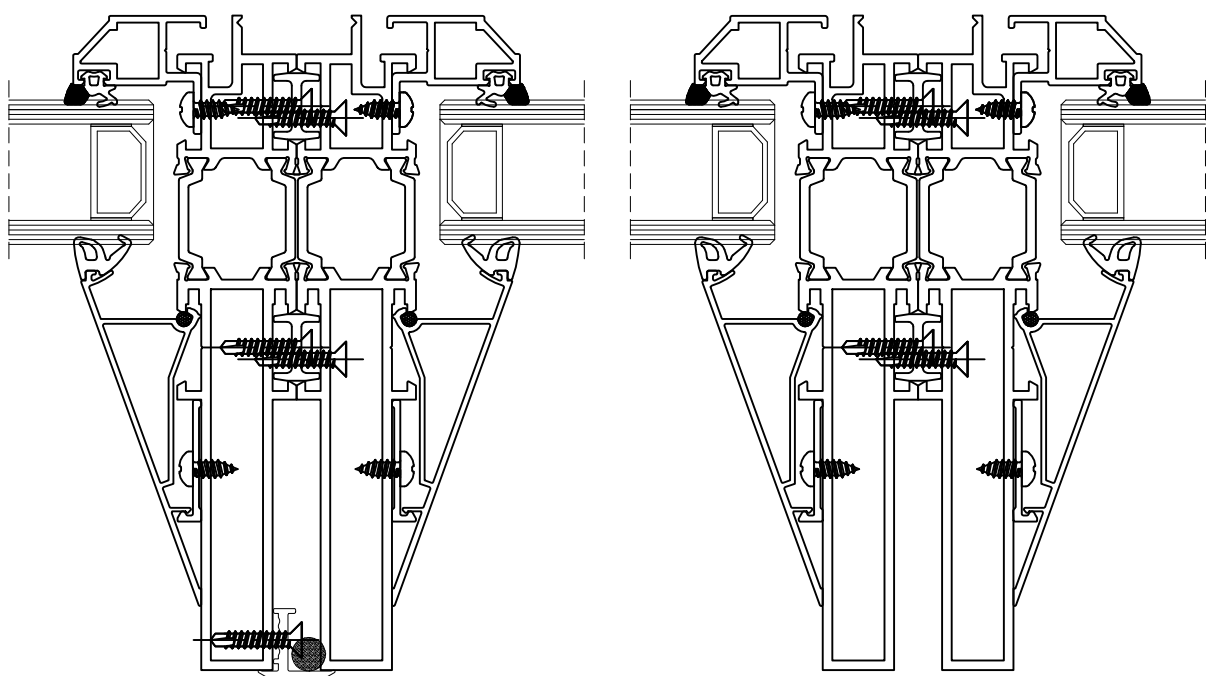


拼樘收口料

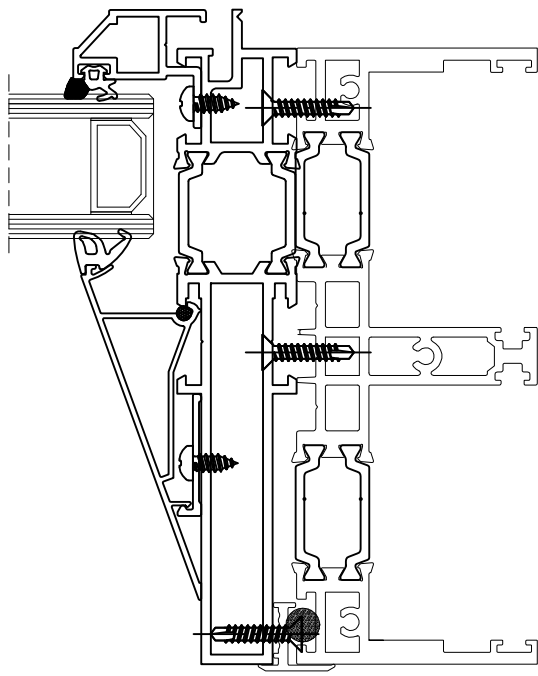


TM-135极窄外开窗型材断面图


名 称	AE135外框
型 号	AE135-10T
壁 厚	2. 0mm
米 重	2. 048kg/m

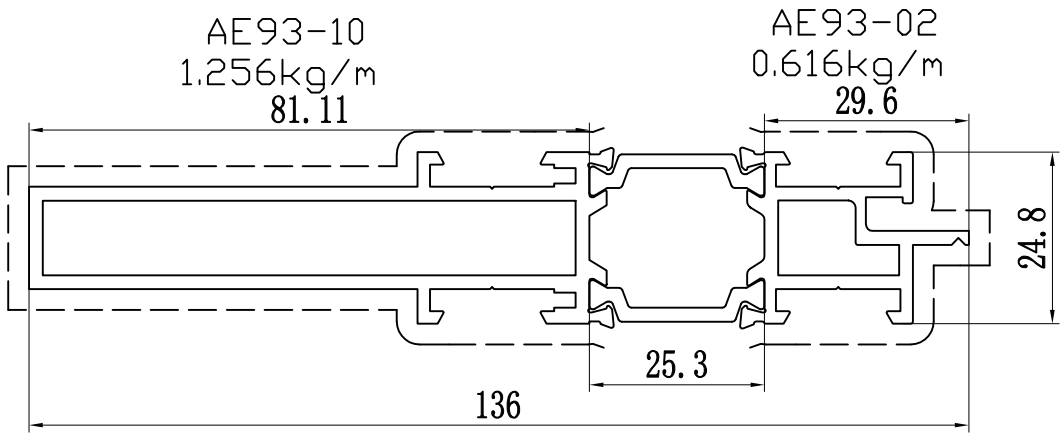


名 称	AE135中柱
型 号	AE135-10R
壁 厚	2. 0mm
米 重	2. 027kg/m

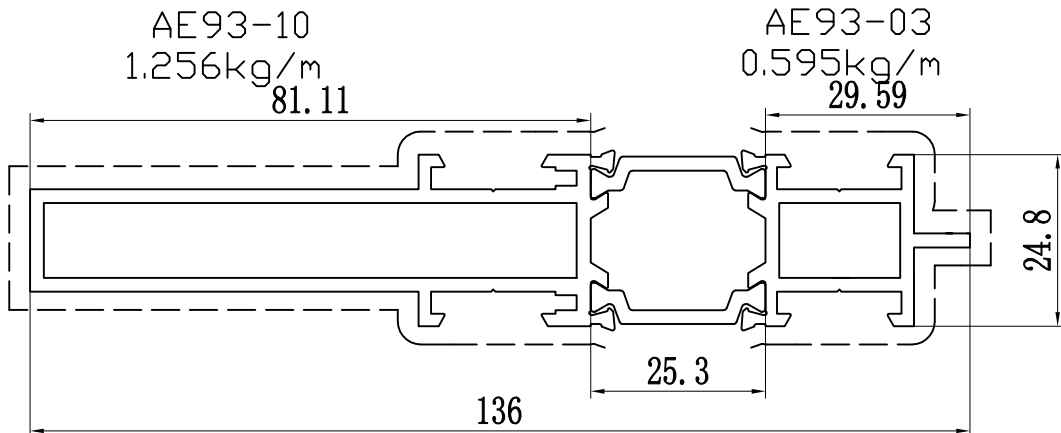


名 称	玻 扇
型 号	TM93-01
壁 厚	2. 0mm
米 重	1. 65kg/m

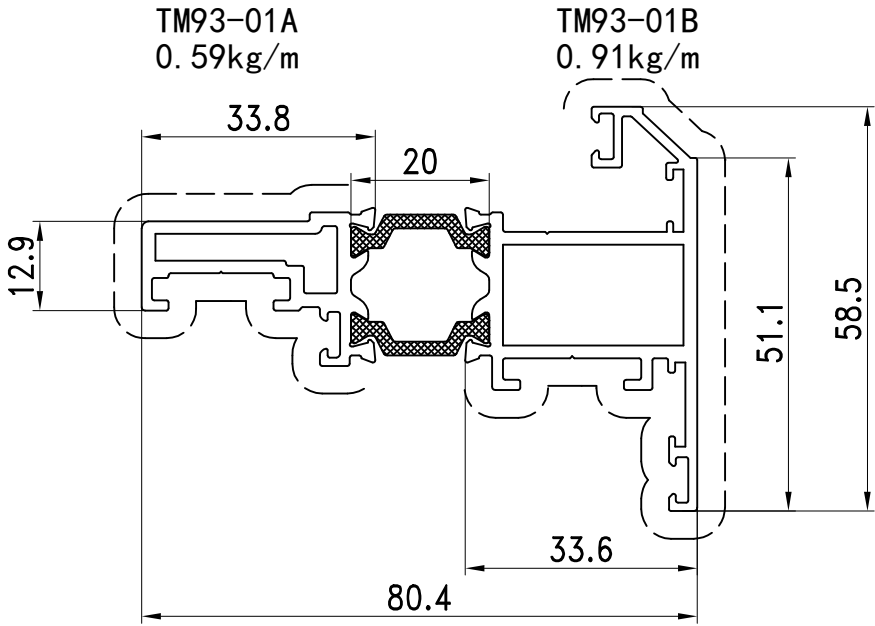


名 称	整框压线盖板
型 号	TM93-02A
壁 厚	1. 3mm
米 重	0. 16kg/m

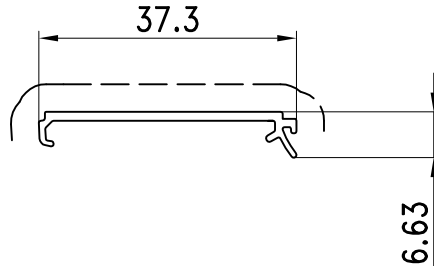


名 称	整框压线底框
型 号	TM93-02B
壁 厚	1. 3mm
米 重	0. 44kg/m

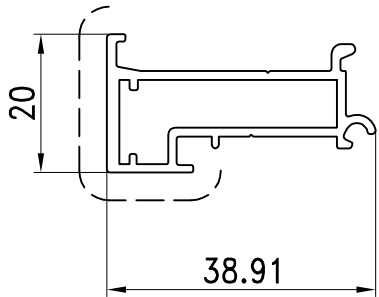


名 称	玻扇副框
型 号	TM93-03
壁 厚	1. 3mm
米 重	0. 49kg/m

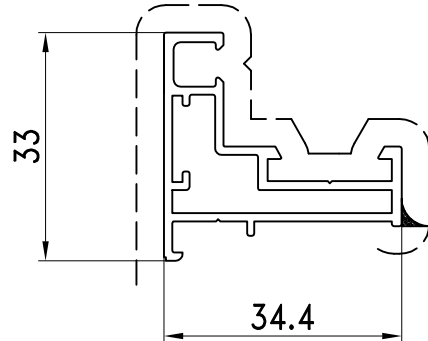


名 称	纱扇
型 号	TM135-01
壁 厚	1. 6mm
米 重	0. 73kg/m

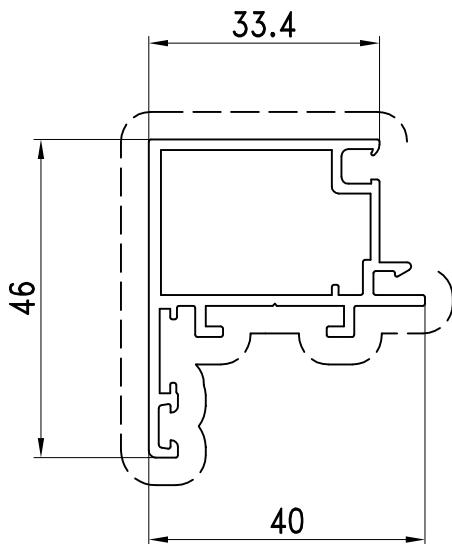

名 称	纱扇压线
型 号	TM135-02
壁 厚	1. 2mm
米 重	0. 13kg/m













名 称	纱扇副框
型 号	TM135-03
壁 厚	1. 3mm
米 重	0. 23kg/m

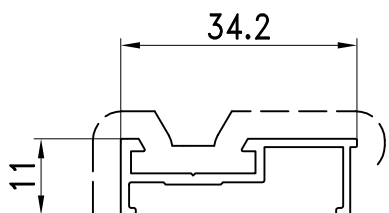


*适用30mm总厚玻璃
如：5+20A+5

名 称	固定压线
型 号	TM135-04
壁 厚	1. 2mm
米 重	0. 44kg/m

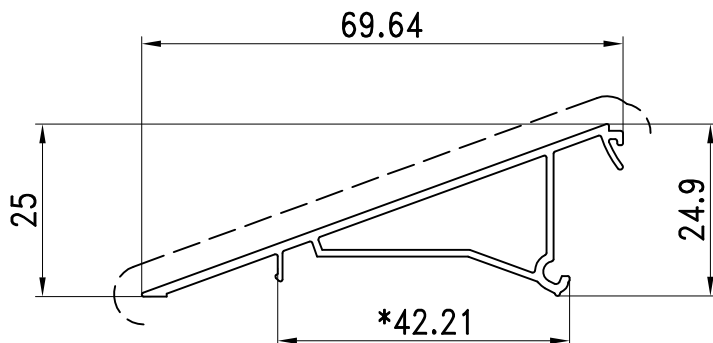
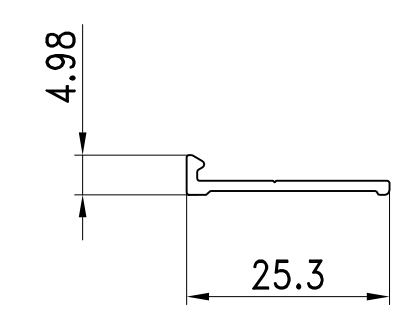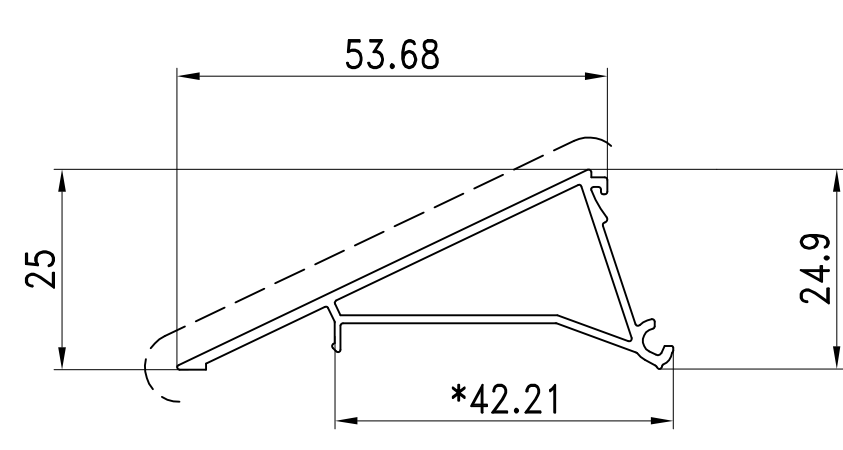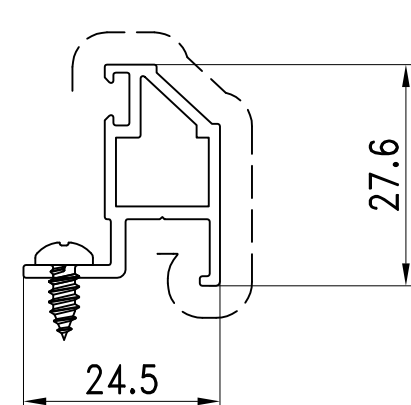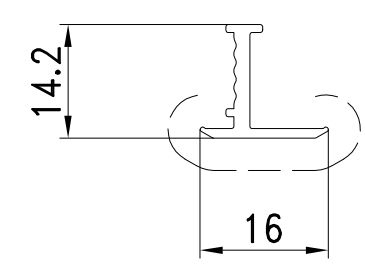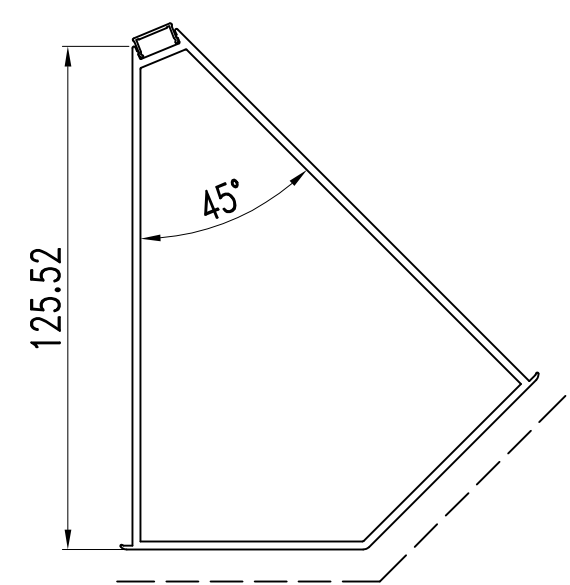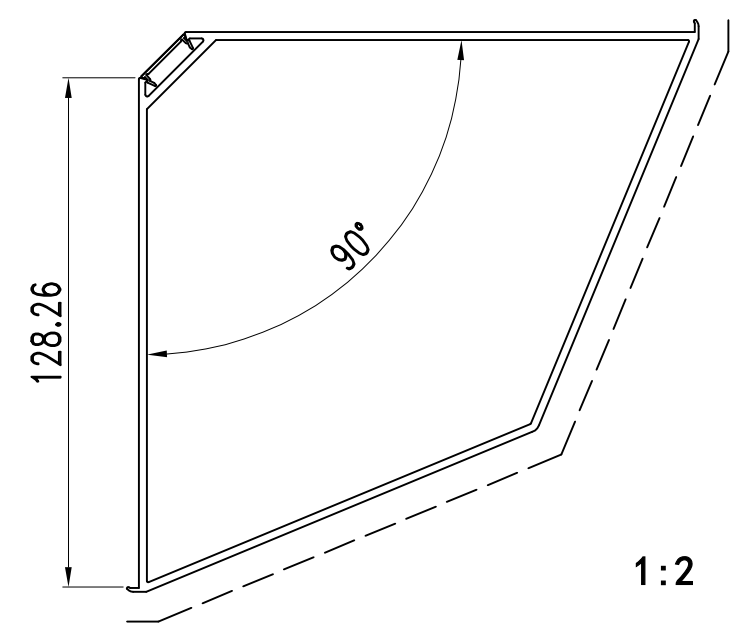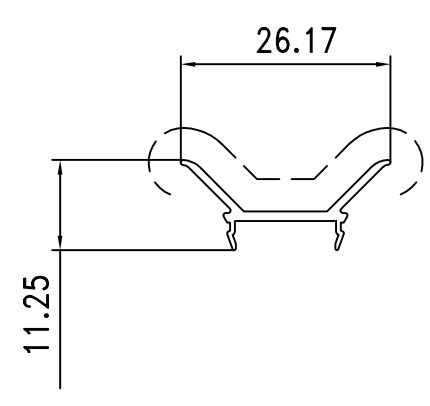
<div>*通用，统一喷涂黑色</div> <div></div>	<table><tr><td>名 称</td><td>压线底座</td></tr><tr><td>型 号</td><td>TM135-05</td></tr><tr><td>壁 厚</td><td>1.3mm</td></tr><tr><td>米 重</td><td>0.11kg/m</td></tr></table>	名 称	压线底座	型 号	TM135-05	壁 厚	1.3mm	米 重	0.11kg/m	<div>*适用45.5mm总厚玻璃 如：12+12A+10+1.52pvb+10</div> <div></div>	<table><tr><td>名 称</td><td>固定压线</td></tr><tr><td>型 号</td><td>TM135-06</td></tr><tr><td>壁 厚</td><td>1.2mm</td></tr><tr><td>米 重</td><td>0.41kg/m</td></tr></table>	名 称	固定压线	型 号	TM135-06	壁 厚	1.2mm	米 重	0.41kg/m
	名 称	压线底座																	
	型 号	TM135-05																	
	壁 厚	1.3mm																	
米 重	0.11kg/m																		
名 称	固定压线																		
型 号	TM135-06																		
壁 厚	1.2mm																		
米 重	0.41kg/m																		
<div></div> <div></div>	<table><tr><td>名 称</td><td>固定外压线</td></tr><tr><td>型 号</td><td>TM93-05</td></tr><tr><td>壁 厚</td><td>1.6mm</td></tr><tr><td>米 重</td><td>0.36kg/m</td></tr></table>	名 称	固定外压线	型 号	TM93-05	壁 厚	1.6mm	米 重	0.36kg/m	<div></div>									
名 称	固定外压线																		
型 号	TM93-05																		
壁 厚	1.6mm																		
米 重	0.36kg/m																		
<div>*通用，统一喷涂黑色</div> <div></div>	<table><tr><td>名 称</td><td>欧标拼檯条</td></tr><tr><td>型 号</td><td>TM93-06</td></tr><tr><td>壁 厚</td><td>2.0mm</td></tr><tr><td>米 重</td><td>0.14kg/m</td></tr></table>	名 称	欧标拼檯条	型 号	TM93-06	壁 厚	2.0mm	米 重	0.14kg/m	<div></div> <div></div>	<table><tr><td>名 称</td><td>拼檯收口条</td></tr><tr><td>型 号</td><td>TM93-07</td></tr><tr><td>壁 厚</td><td>2.0mm</td></tr><tr><td>米 重</td><td>0.13kg/m</td></tr></table>	名 称	拼檯收口条	型 号	TM93-07	壁 厚	2.0mm	米 重	0.13kg/m
名 称	欧标拼檯条																		
型 号	TM93-06																		
壁 厚	2.0mm																		
米 重	0.14kg/m																		
名 称	拼檯收口条																		
型 号	TM93-07																		
壁 厚	2.0mm																		
米 重	0.13kg/m																		
<div></div> <div>1:2</div>	<table><tr><td>名 称</td><td>135° 转角</td></tr><tr><td>型 号</td><td>TM12707</td></tr><tr><td>壁 厚</td><td>2.0mm</td></tr><tr><td>米 重</td><td>2.03kg/m</td></tr></table>	名 称	135° 转角	型 号	TM12707	壁 厚	2.0mm	米 重	2.03kg/m	<div></div>	<table><tr><td>名 称</td><td>转角盖板</td></tr><tr><td>型 号</td><td>TM8508</td></tr><tr><td>壁 厚</td><td>0.8mm</td></tr><tr><td>米 重</td><td>0.04kg/m</td></tr></table>	名 称	转角盖板	型 号	TM8508	壁 厚	0.8mm	米 重	0.04kg/m
名 称	135° 转角																		
型 号	TM12707																		
壁 厚	2.0mm																		
米 重	2.03kg/m																		
名 称	转角盖板																		
型 号	TM8508																		
壁 厚	0.8mm																		
米 重	0.04kg/m																		
<div></div> <div>1:2</div>	<table><tr><td>名 称</td><td>90° 转角</td></tr><tr><td>型 号</td><td>TM12708</td></tr><tr><td>壁 厚</td><td>2.0mm</td></tr><tr><td>米 重</td><td>2.64kg/m</td></tr></table>	名 称	90° 转角	型 号	TM12708	壁 厚	2.0mm	米 重	2.64kg/m	<div>新开模</div> <div></div>	<table><tr><td>名 称</td><td>转角内盖板</td></tr><tr><td>型 号</td><td>TM135-07</td></tr><tr><td>壁 厚</td><td>1.2mm</td></tr><tr><td>米 重</td><td>0.11kg/m</td></tr></table>	名 称	转角内盖板	型 号	TM135-07	壁 厚	1.2mm	米 重	0.11kg/m
名 称	90° 转角																		
型 号	TM12708																		
壁 厚	2.0mm																		
米 重	2.64kg/m																		
名 称	转角内盖板																		
型 号	TM135-07																		
壁 厚	1.2mm																		
米 重	0.11kg/m																		





天迈铝业
TIAN MAI LV YE



TM-135极窄外开窗

安装副框装配示意图



1、全铝副框安装示意图

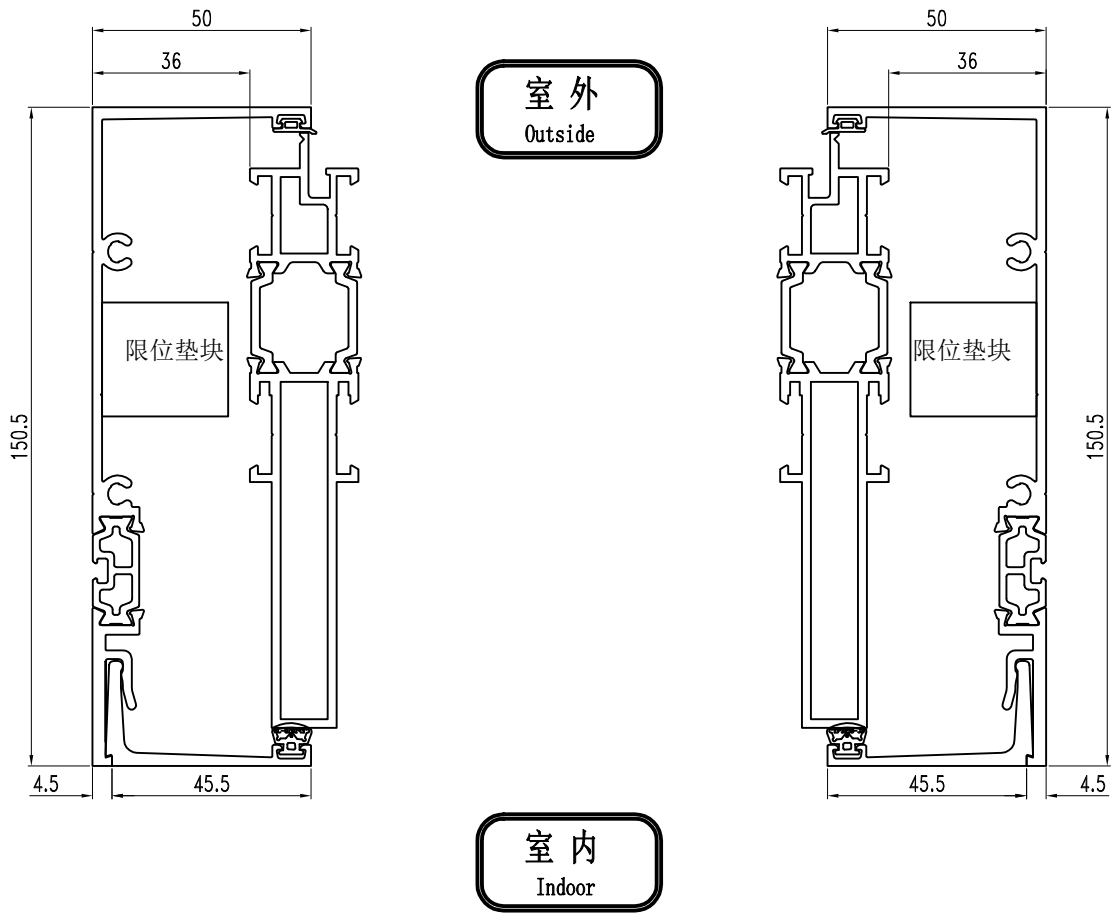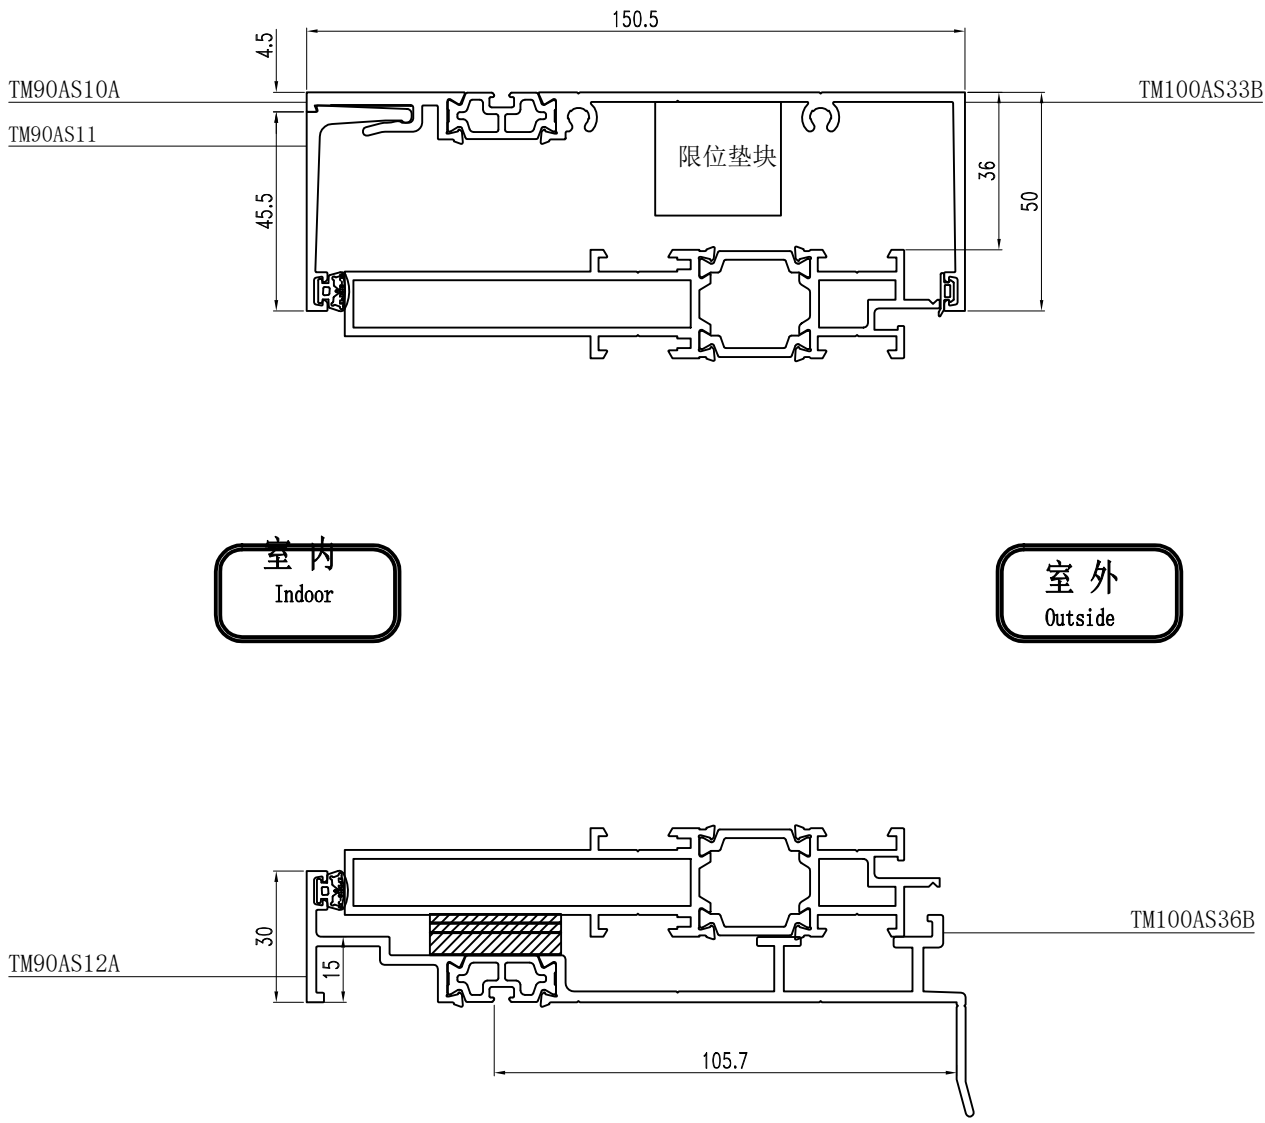

2、欧标槽通用木副框安装示意图

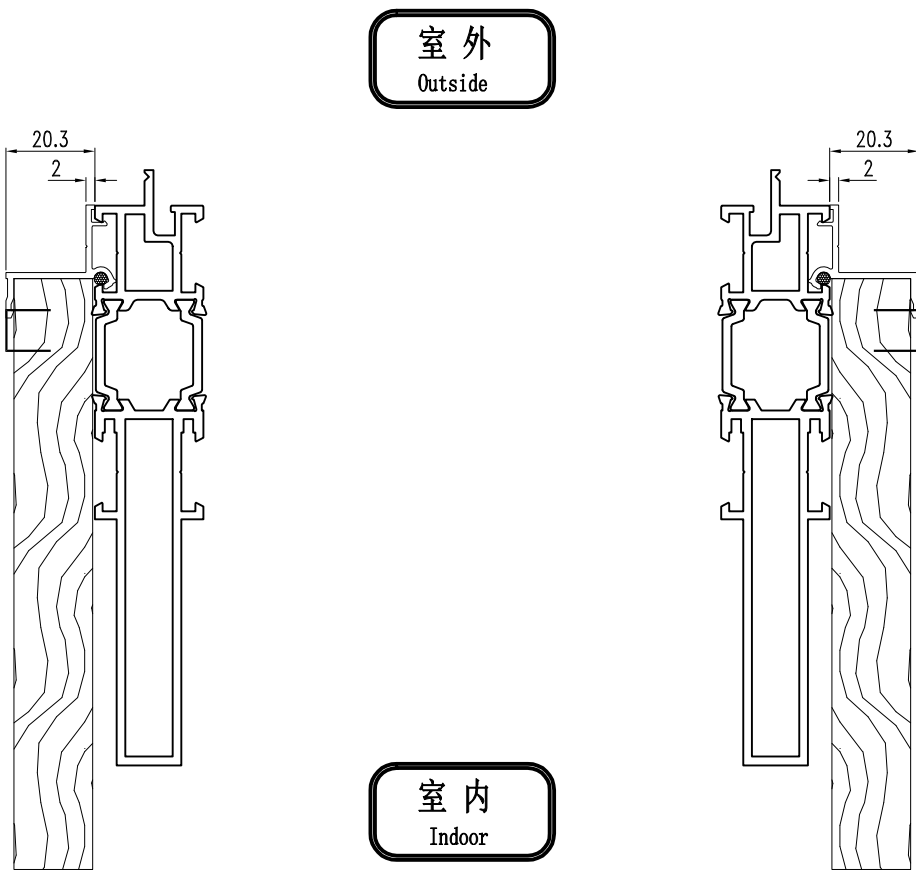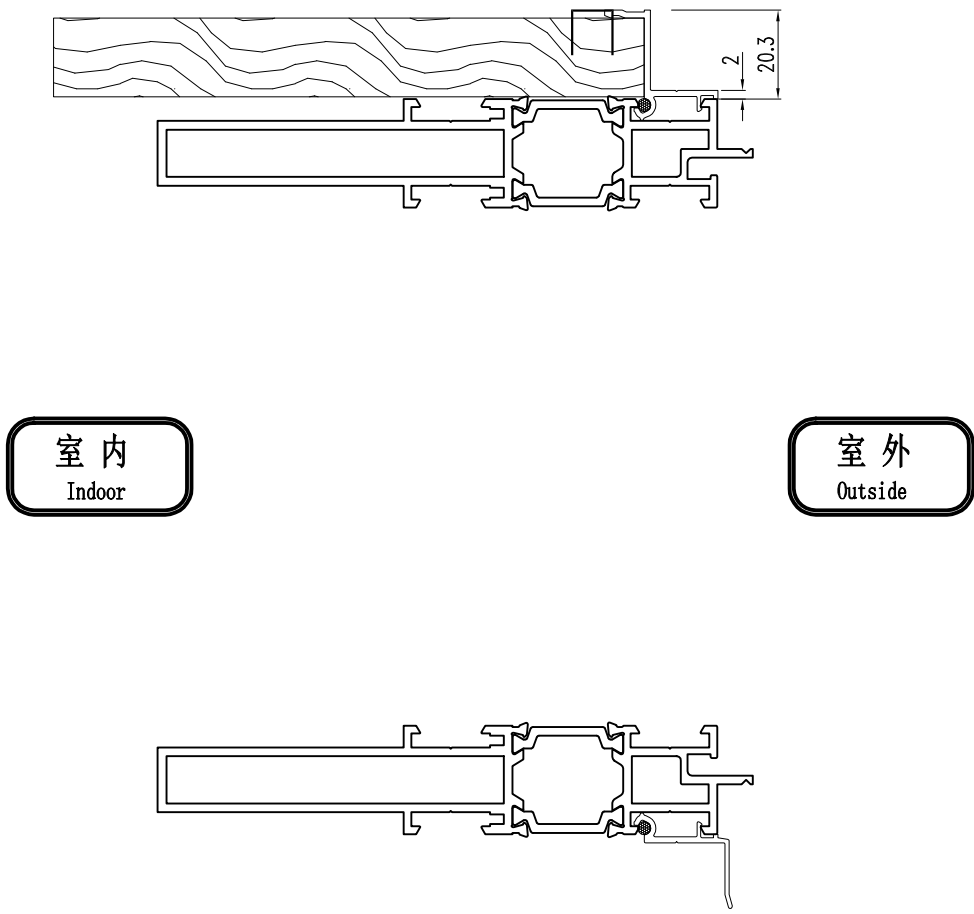

3、欧标槽通用铝条安装示意图

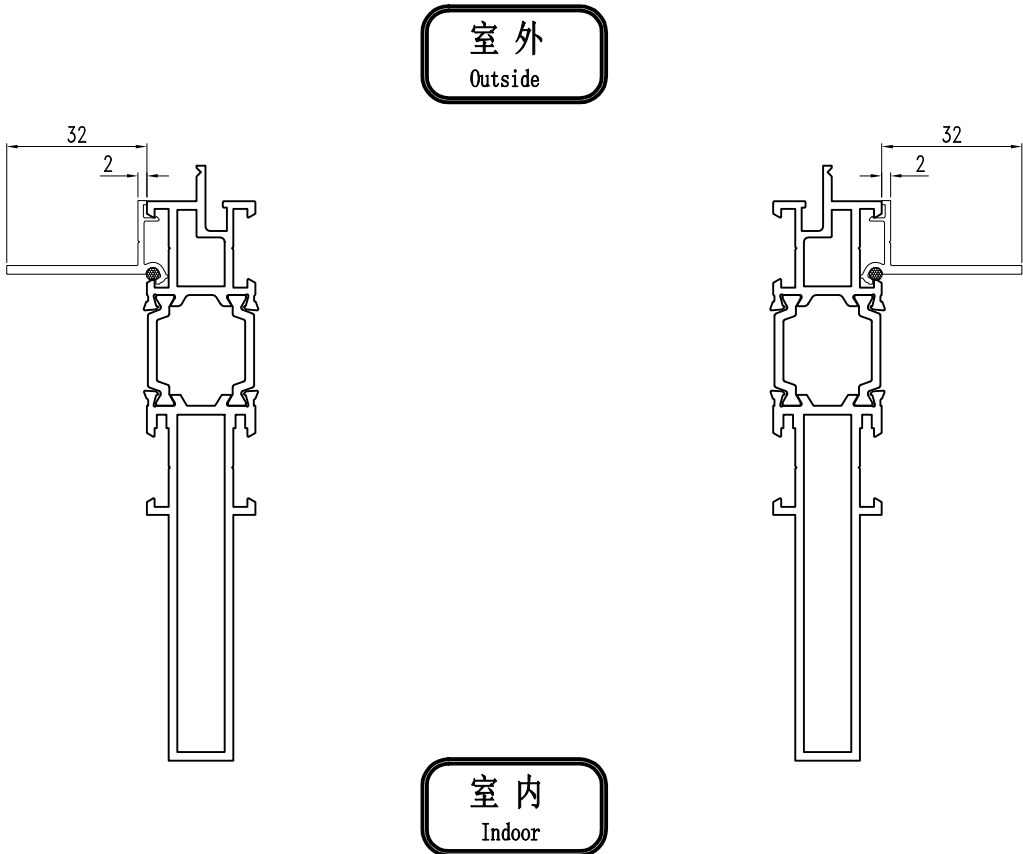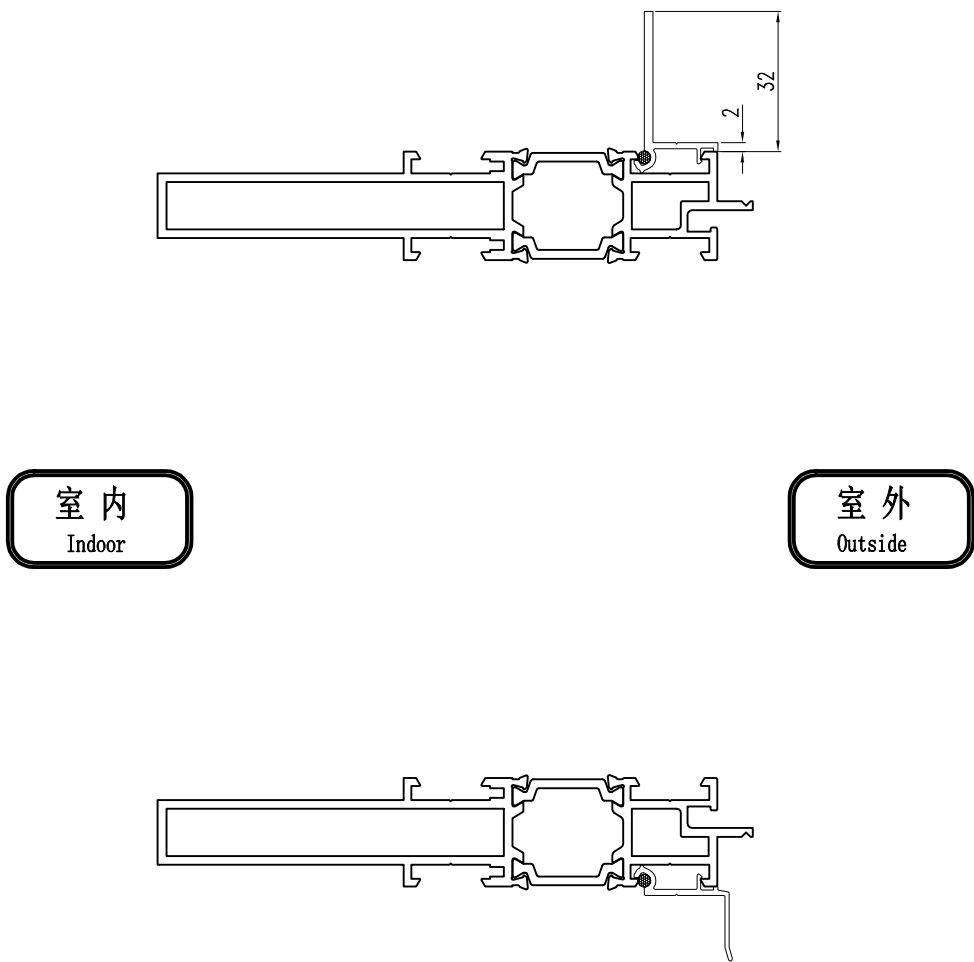

AURA LIVING

A considered entrance.

TM-70 glazed swing-door product appearance



Appearance concept. Finish, hardware, dimensions and installation details require confirmation.

AURA LIVING

One step closer to outside.

TM-70 in a warm residential interior



Application visualization. Final door configuration follows project requirements.

AURA LIVING

An invitation home.

TM-70 at a landscaped courtyard entrance



Application visualization. Setting, finish and hardware are illustrative.

TM-70 / system details

Supplier-overview information

Opening options	Inward or outward swing, per supplier overview
-----------------	--

Material / profile wall	GB6063-T5 aluminum / listed 2.2 mm
-------------------------	------------------------------------

Frame / sash section	69.4 x 70 mm / 80 x 106 mm
----------------------	----------------------------

Glass examples	5 + 20A + 5 mm; 5 + 12A + 5 + 12A + 5 mm
----------------	--

Thermal break / seals	25 mm frame and sash strips / triple EPDM
-----------------------	---

Listed sash range	Width 500-1200 mm; height 1000-3000 mm
-------------------	--

Listed hardware load	Up to 180 kg; project-specific selection required
----------------------	---

Screen options in source	Roll or folding screen; not shown in these renders
--------------------------	--

SOURCE AND REVIEW NOTES


Source: TM-70 supplier overview, PDF page 1 (printed pages 53-54).

Maximum width, height and load are not a guarantee that all limits can be combined in one door.

Source lists mill-finish aluminum; charcoal is a visual proposal pending finish confirmation.


天迈平开门 70 系列断桥型材装配图 (内开平开门)

TIANMAI CASEMENT DOOR 70 SERIES THERMAL BREAK PROFILE ASSEMBLY(INWARD OPENING CASEMENT DOOR)

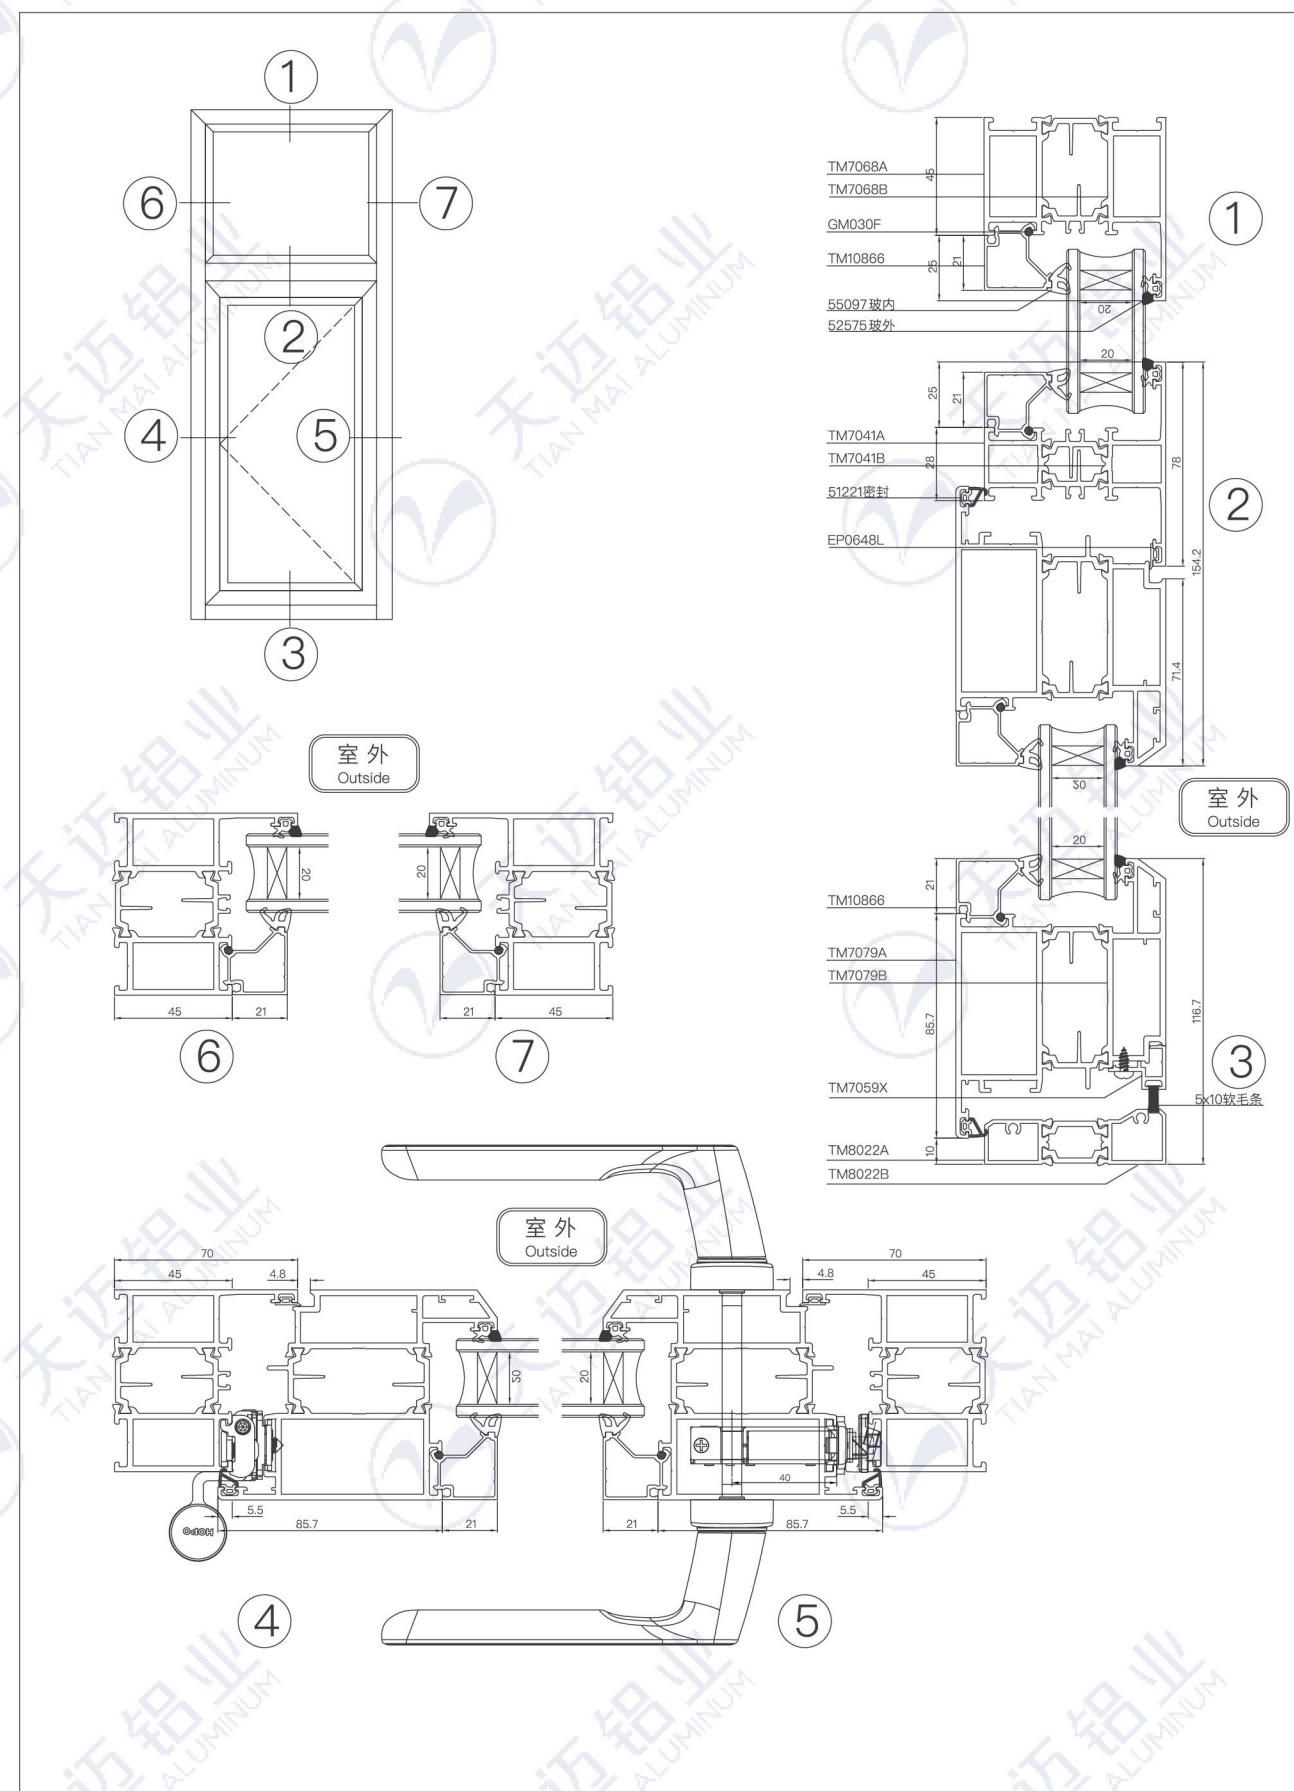


天迈平开门 70 系列断桥型材装配图 (外开平开门带转向框)


TIANMAI CASEMENT DOOR 70 SERIES THERMAL BREAK PROFILE ASSEMBLY(OUTWARD OPENING CASEMENT DOOR WITH TURNING FRAME)

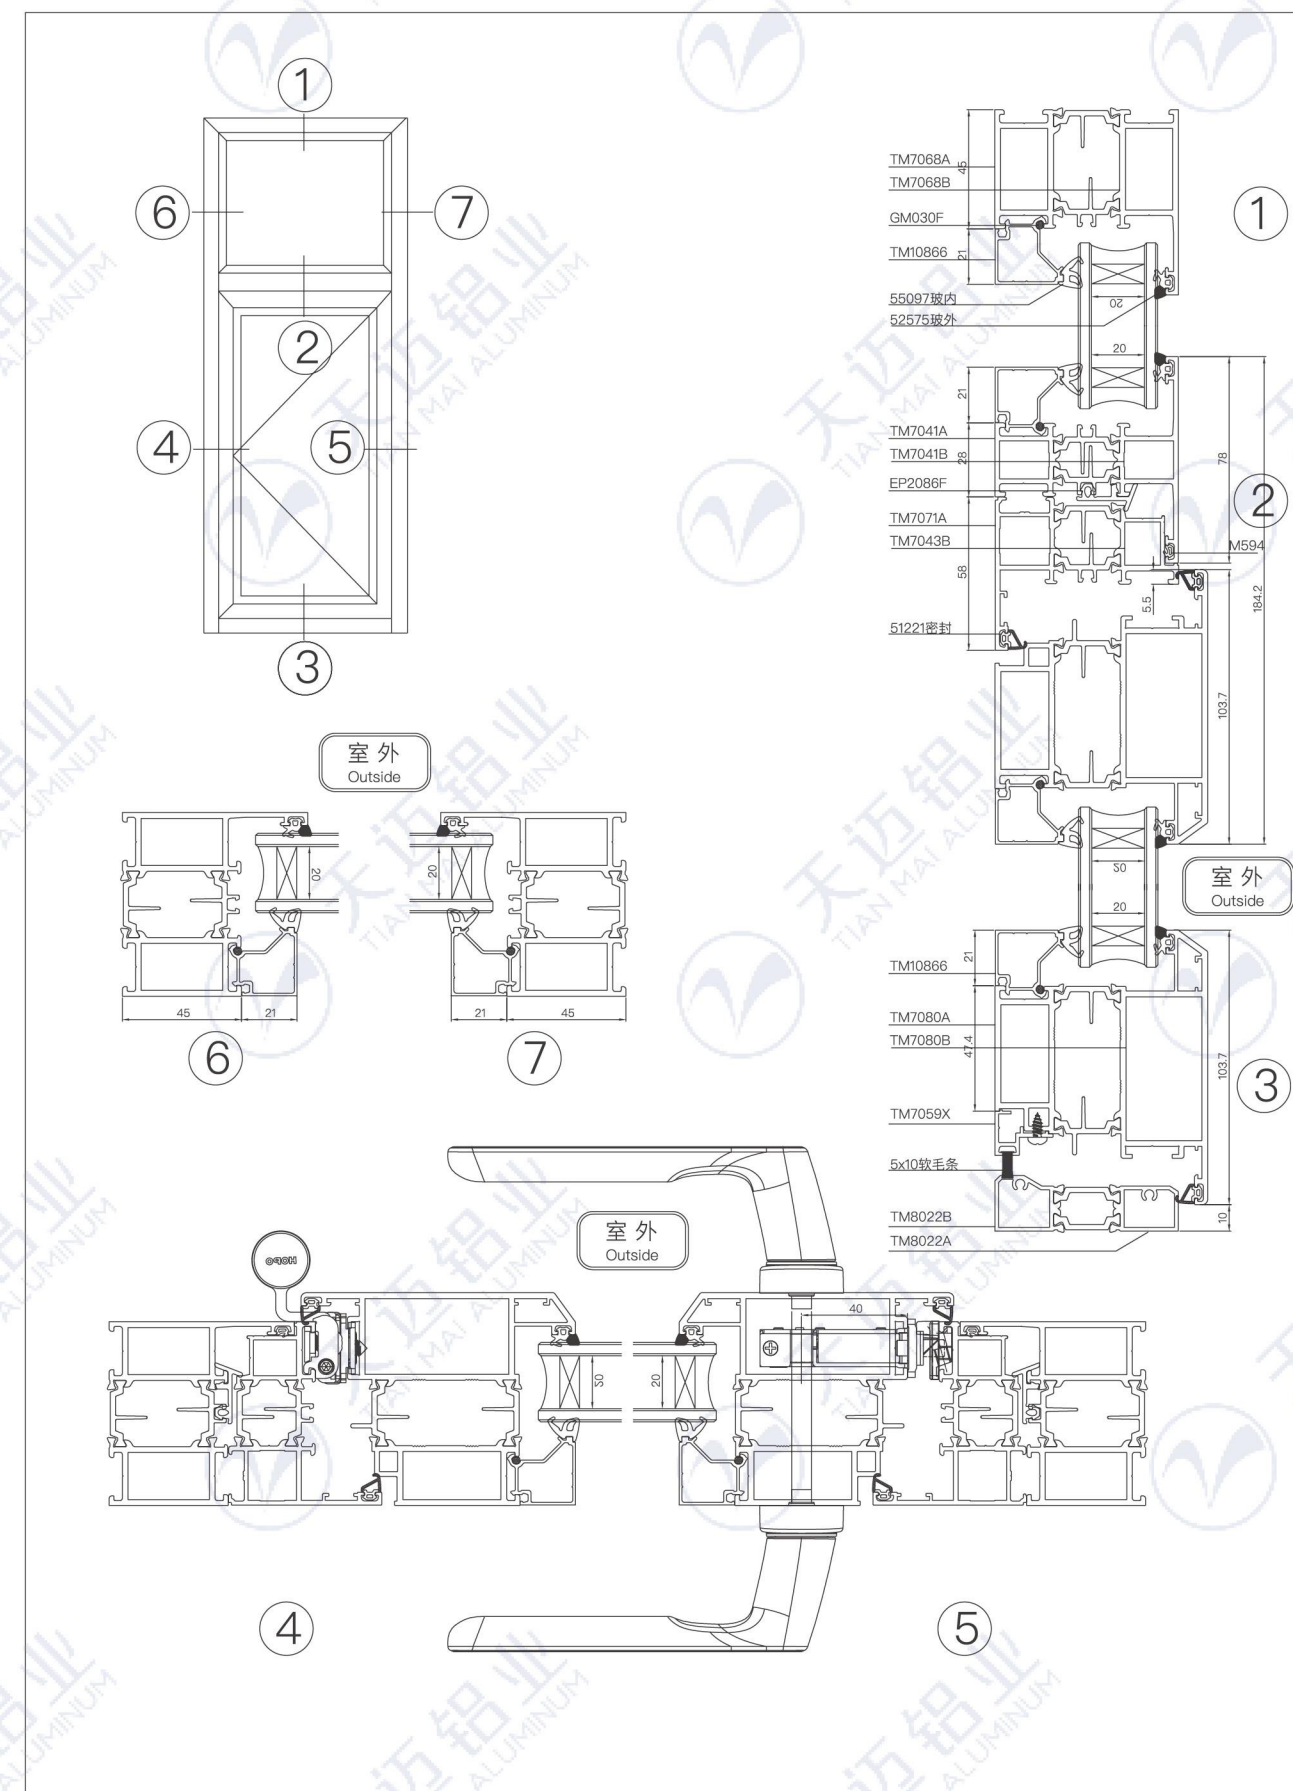


天迈平开门 70 系列断桥型材装配图 (外开平开门、不带转换)
TIANMAI CASEMENT DOOR 70 SERIES THERMAL BREAK PROFILE ASSEMBLY(OUTWARD OPENING CASEMENT DOOR、NO SHIFT)

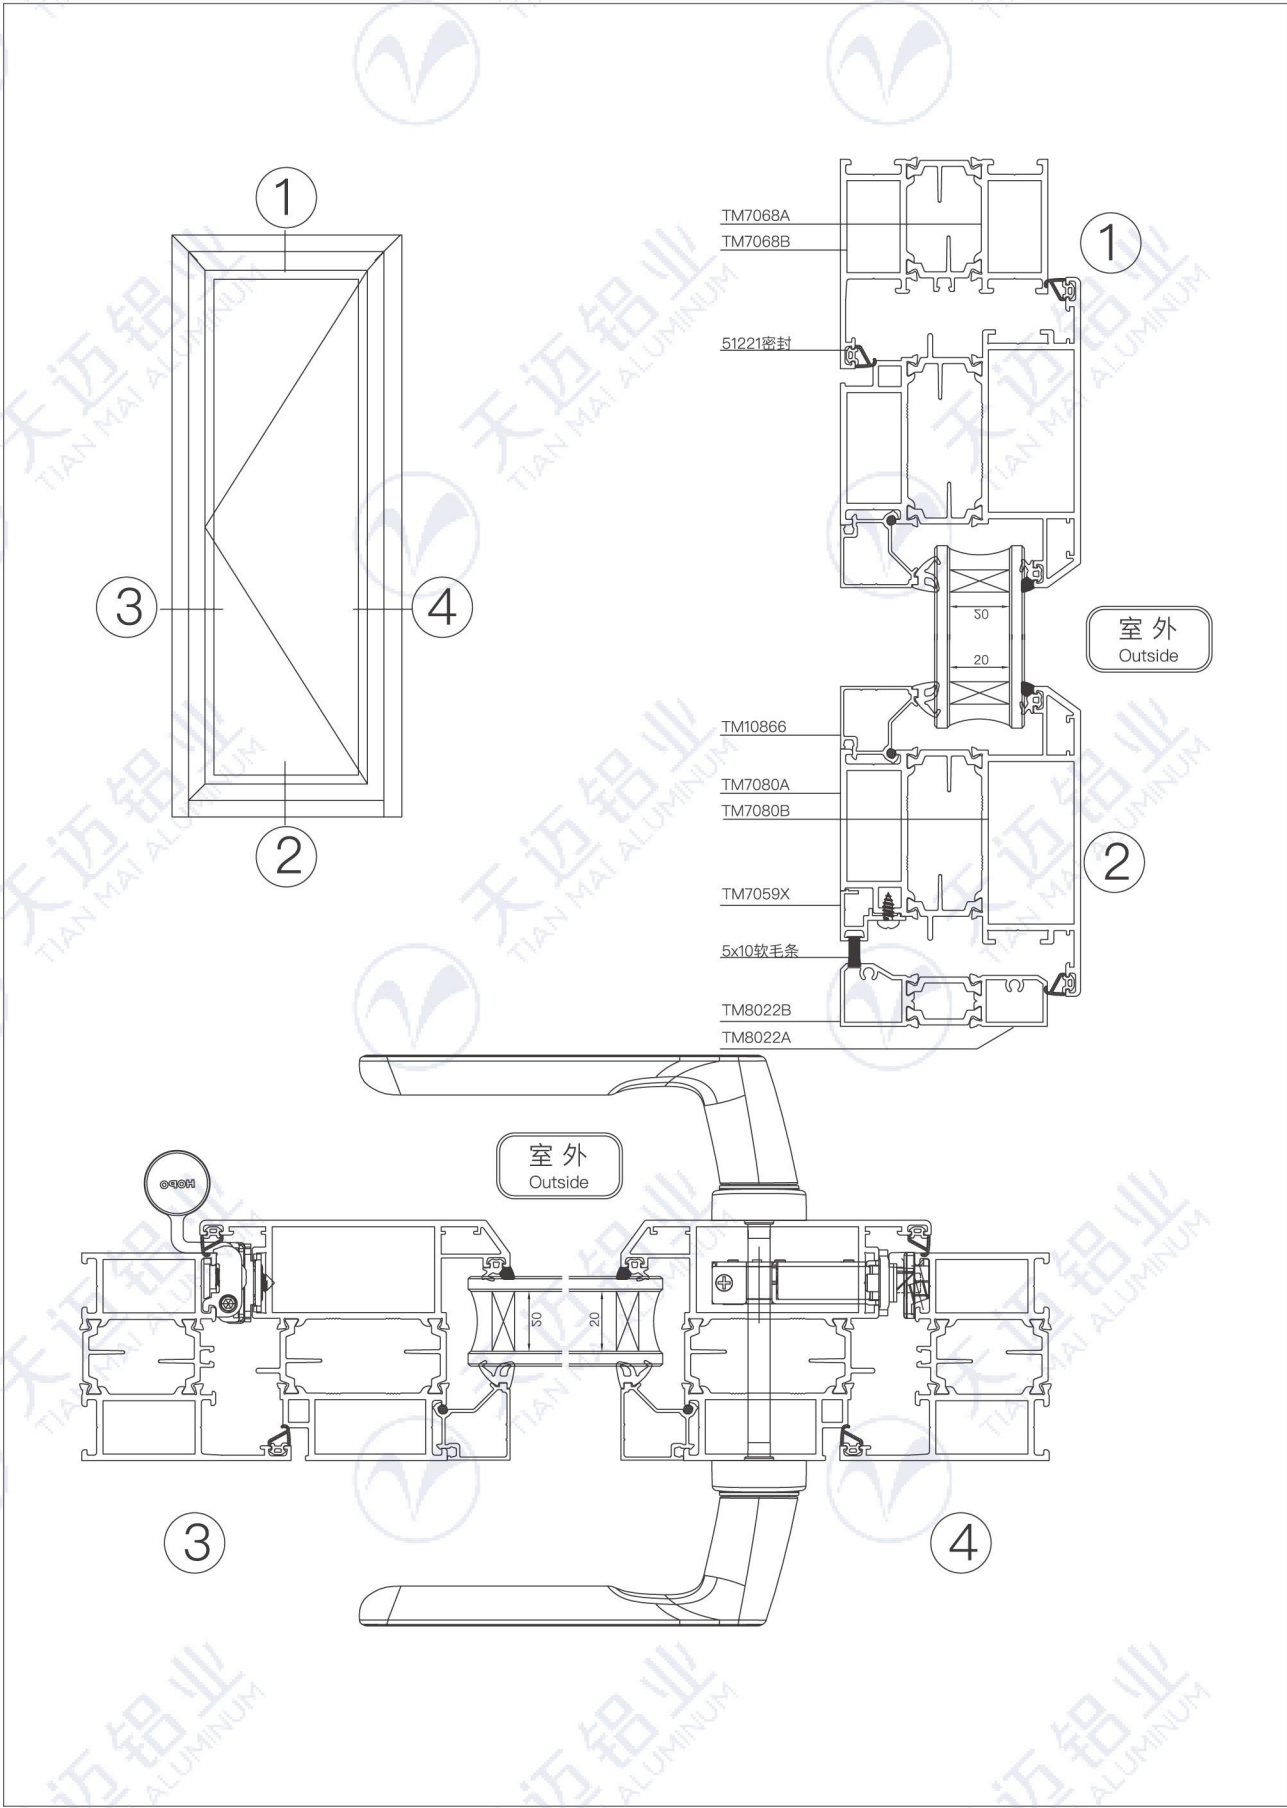

外开门对开收口装配 OUTWARD OPENING FRENCH DOOR TRIM ASSEMBLY












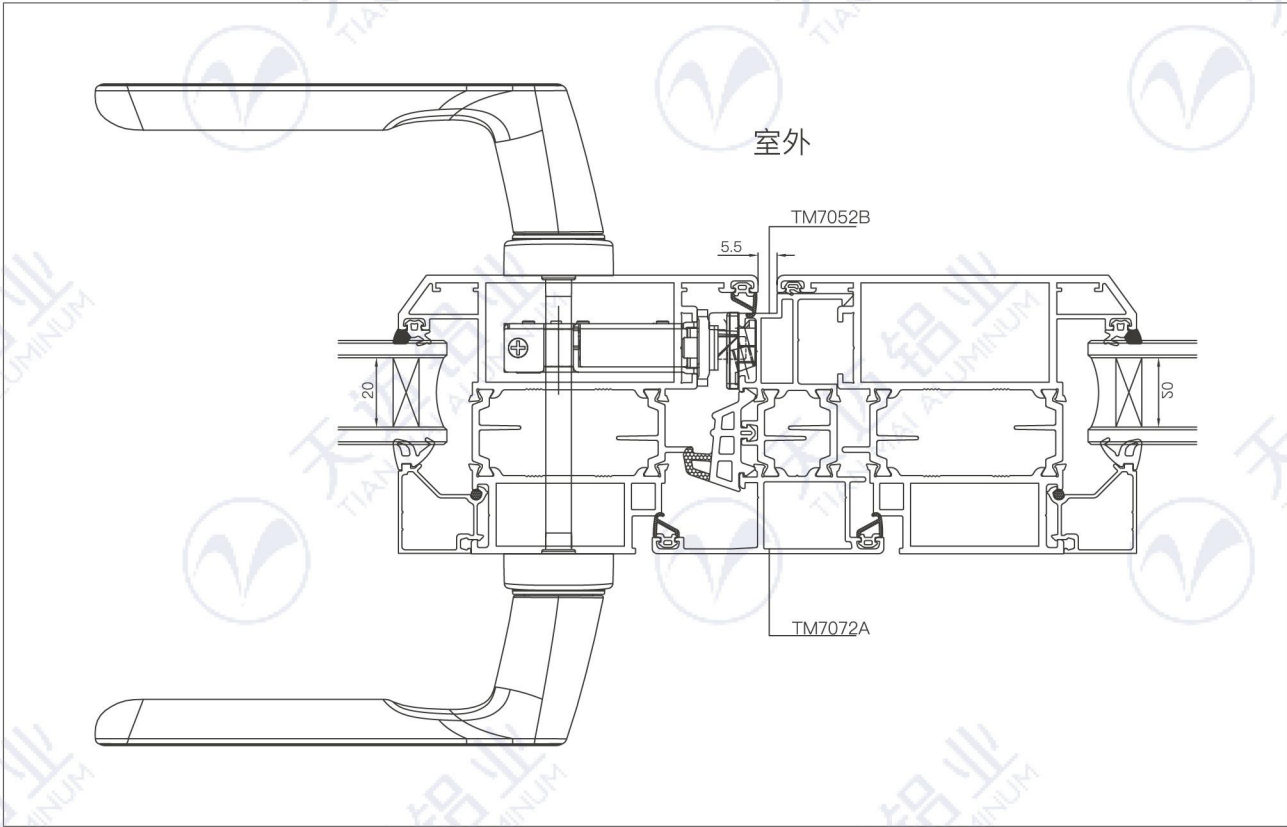


内开门对开收口装配 INWARD OPENING FRENCH DOOR TRIM ASSEMBLY







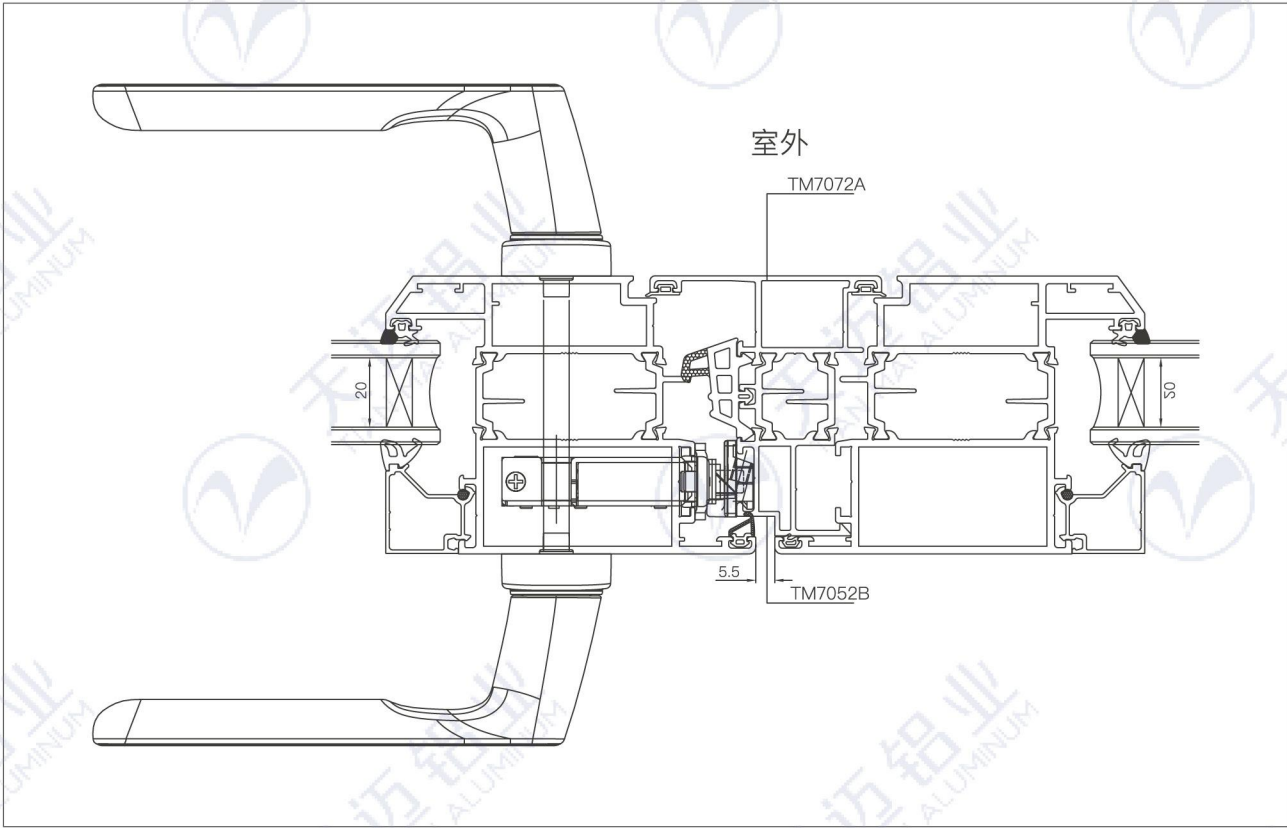


天迈平开门 70 系列断桥型材断面图











TM-70 SERIES THERMAL BREAK SWING DOOR PROFILE CROSS-SECTION DRAWING

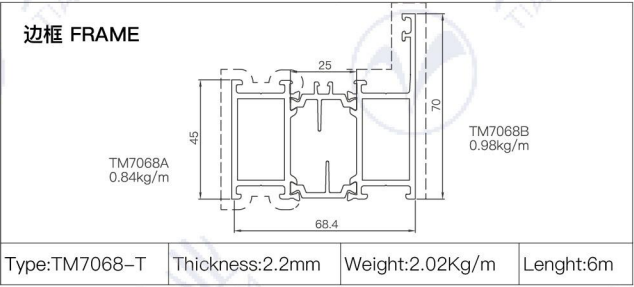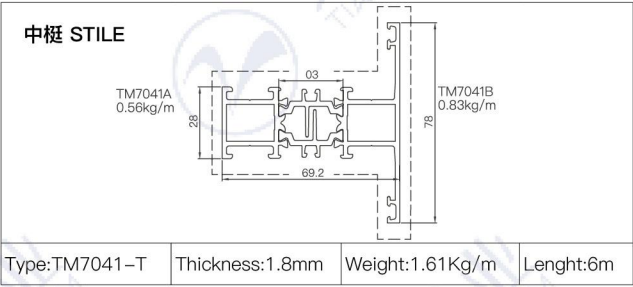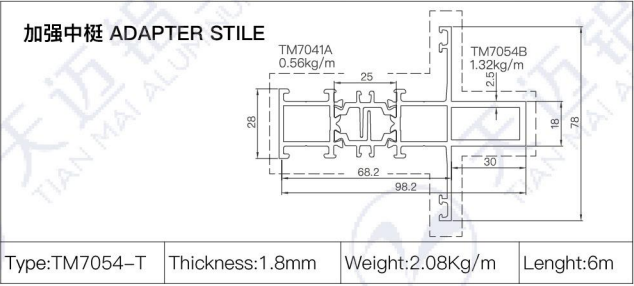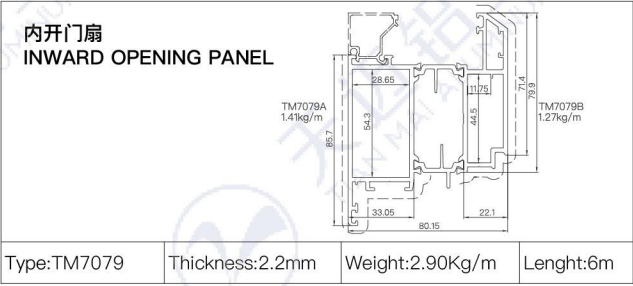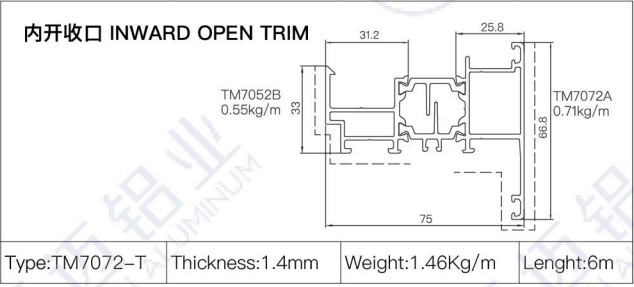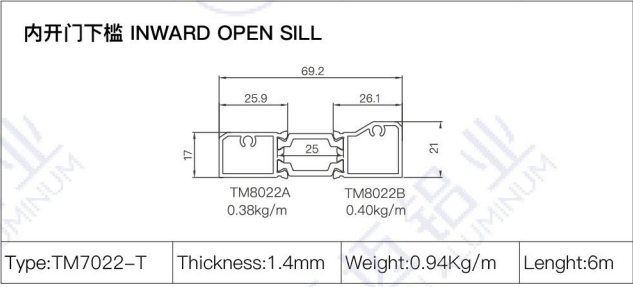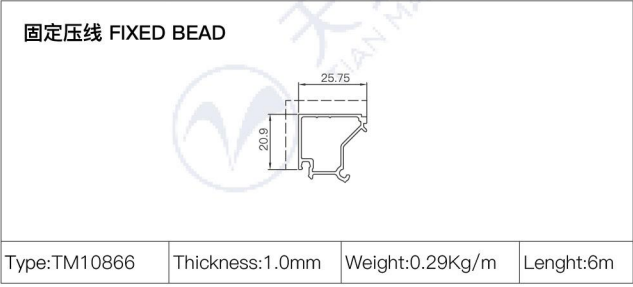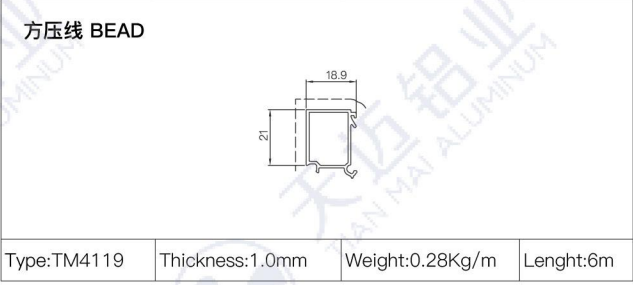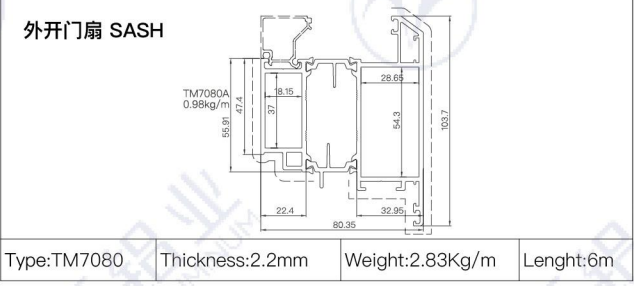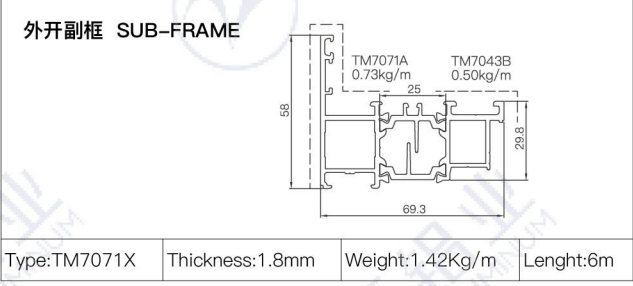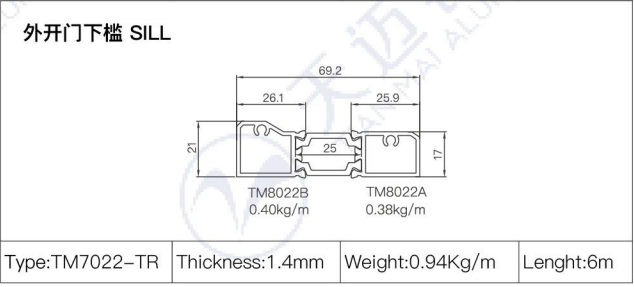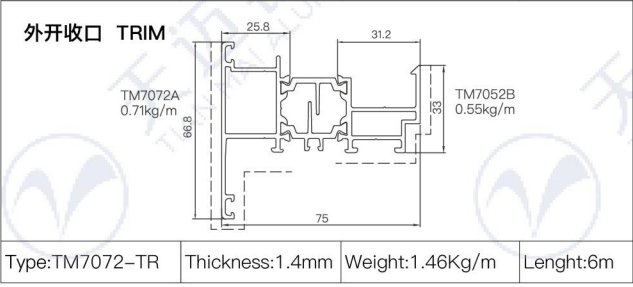


天迈平开门 70 系列辅件 TIANMAI CASEMENT 70 SERIES ACCESSORY

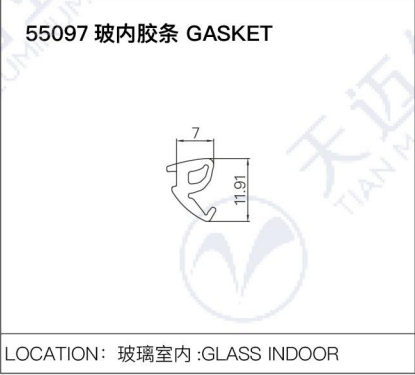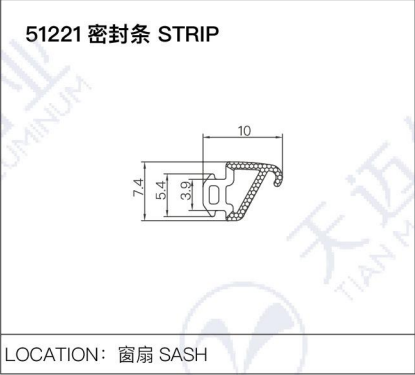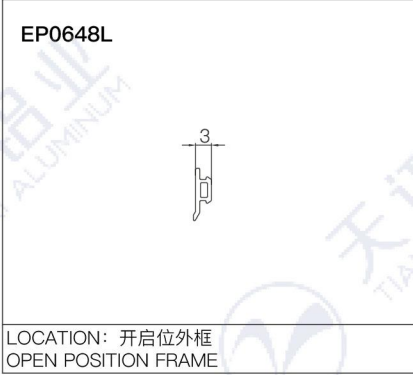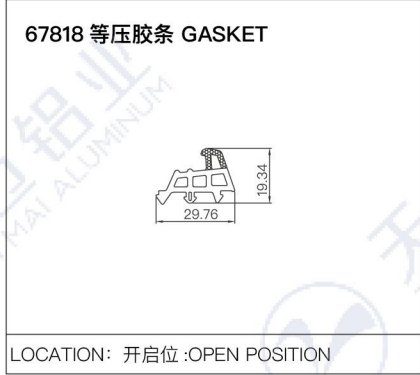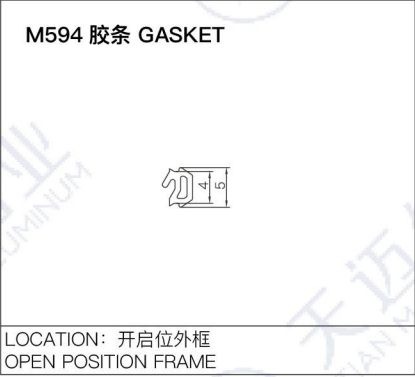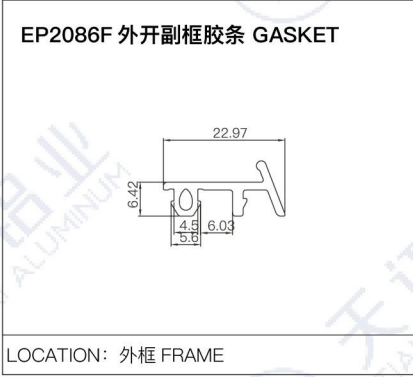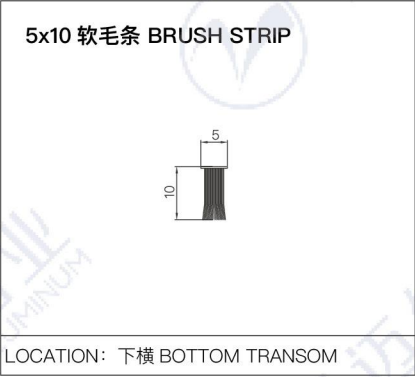

天迈平开门 70 系列辅件 TIANMAI CASEMENT 70 SERIES ACCESSORY

<div>17.5*30.3 高一体角码 (C) BLEAT</div> <div></div> <div>LOCATION: 边框 / 外开副框大 FRAME/SUB-FRAME</div>	<div>宽度 14.1mm 中梃连接件 CONNECTOR</div> <div></div> <div>LOCATION: 中梃 STILE</div>	<div>28.2*53.5 高一体角码 (B) BLEAT</div> <div></div> <div>LOCATION: 门扇大 PANEL</div>
<div>11.4*44.2 高一体角码 (C) BLEAT</div> <div></div> <div>LOCATION: 内开玻扇小 INWARD OPEN PANEL</div>	<div>17.7*36.7 高分体角码 (C) BLEAT</div> <div></div> <div>LOCATION: 外开玻扇小 OUTWARD OPEN PANEL</div>	<div>18.3*18 高分体角码 (C) BLEAT</div> <div></div> <div>LOCATION: 边框 / 外开副框大 FRAME/SUBFRAME</div>
<div>13.2*16 高一体角码 (C) BLEAT</div> <div></div> <div>LOCATION: 外开副框小 OUTWARD OPEN FRAME</div>	<div>方轴平开门把手 HANDLE</div> <div></div> <div>LOCATION: 平开门扇 CASEMENT DOOR STILE</div>	<div>40 平开门锁体 LOCK</div> <div></div> <div>LOCATION: 平开门扇 CASEMENT DOOR STILE</div>
<div>平开门锁座 LOCK BASE</div> <div></div> <div>LOCATION: 平开门框 SWING DOOR FRAME</div>	<div>平开门合页 HINGE</div> <div></div> <div>LOCATION: 平开门框 SWING DOOR FRAME</div>	

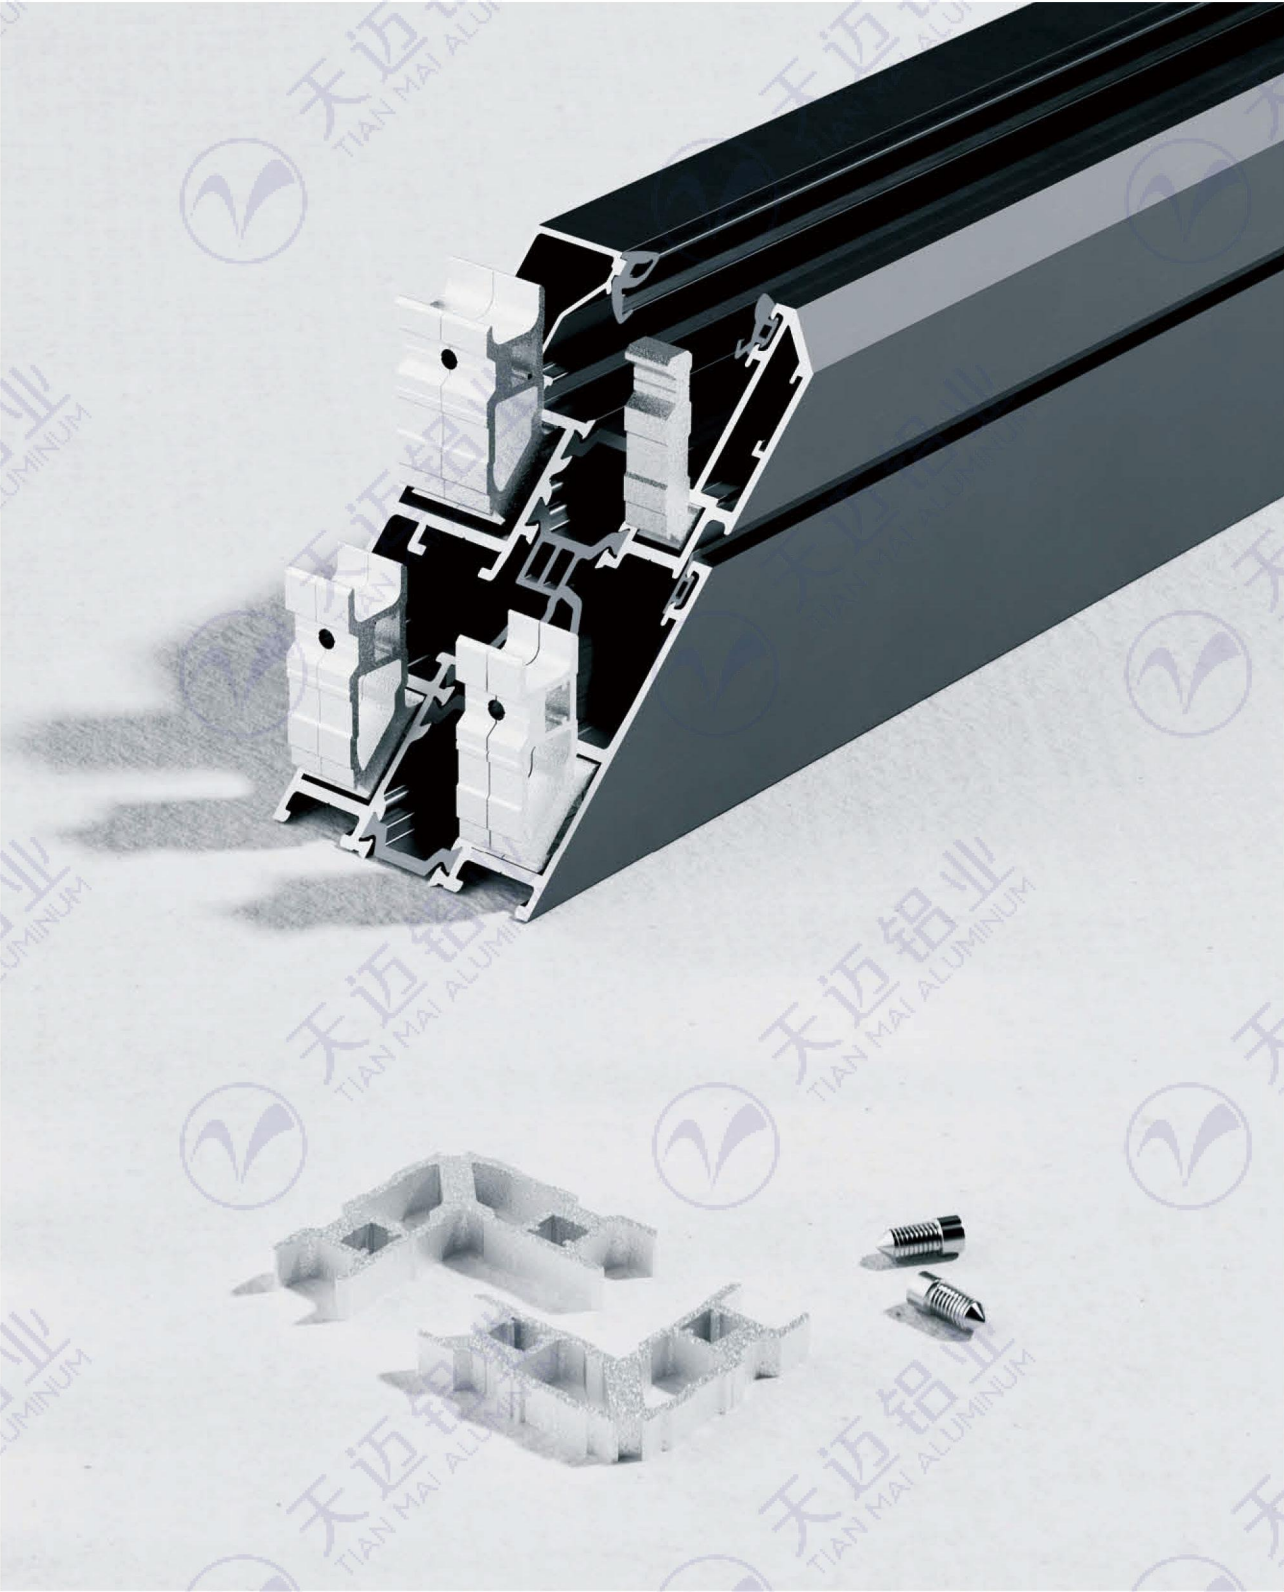

分体膨胀角码

效率高，牢固平整，可反复拆装
HIGH EFFEICIENCY FIRM AND FLATCAN BE
DISASSEMBLED REPEATEDLY

AURA LIVING

More glass. A simple movement.

32XG two-panel sliding-door product appearance



Appearance concept. Exact profile, handles, finish and dimensions require confirmation.

AURA LIVING

Living, extended.

32XG opening a living room to the garden



Application visualization. Track and drainage remain part of the project-specific installation.

AURA LIVING

Evenings, connected.

32XG at a covered terrace



Application visualization. Setting and finish are illustrative.

32XG / system details

Supplier node-drawing information

Configuration shown	Two manual sliding leaves on parallel tracks
Screen sash	No screen sash in this drawing package
Head / base section width	108 mm indicated on PDF page 1
Head / base frame height	50 mm indicated on PDF page 1
Drainage	Stepped drainage track and side drain holes shown
Additional base assembly	180 mm overall width shown for drainage-system base
Project dimensions	Overall width, height and leaf widths are variables

SOURCE AND REVIEW NOTES

Source: YIBIAO 32XG node drawing, PDF page 1.

Dimensions are local section callouts and must not be read as overall door dimensions.

No glass build-up, maximum leaf size, load rating or performance certification is inferred.

32XG系列

- ☆设计说明:
1. 图中除特别注明外的所有标注单位均为毫米;
 2. 图中所有标注均以实际测量尺寸为准;
 3. 其它



☆设计变更☆

1.	
2.	
3.	
4.	
5.	
6.	
7.	
8.	
9.	

客户确认:
CUSTOMER AFFIRMED

业主/承建商:
Client/Contractor

项目名称:
PROJECT

系列节点图

绘图: DRAWER	日期: DATE	
审核: AUDIT		
批准: PERMIT		

图称: 门窗节点图
视图: 内视图
比例: 1:1
页码: 共/张第/页

